

Smart Metering MCCB

MTM5M、MT88M

Communication Protocol

V1.013

12/2025



INDEX

1 MODBUS COMMUNICATION	1
1.1 OVERVIEW	1
1.2 MODBUS PROTOCOL	1
1.3 MODBUS_RTU TRANSMISSION MODE	2
1.4 CRC CHECK CODE GENERATION PROCESS	3
1.5 EXAMPLES OF COMMUNICATION MESSAGES	5
2 REGISTER LIST: BASIC ELECTRICAL PARAMETERS	7
2.1 BASIC ELECTRICAL PARAMETER QUERY	7
3 REGISTER LIST: BASIC PARAMETER	12
3.1 BASIC PARAMETER SETTINGS/QUERY	12
4 REGISTER LIST: CONTROL	16
4.1 COMMAND SOFTWARE CONTROL	16
4.2 REMOTE CONTROL/QUERY	16
5 REGISTER LIST: ENERGY	18
5.1 ENERGY QUERY	18
5.2 HOURLY FROZEN ENERGY QUERY	27
6 REGISTER LIST: PROTECTION	28
6.1 FUNCTION SELECTION SETTINGS/QUERY	28
7 REGISTER LIST: RECORD QUERY	30
7.1 CUMULATIVE RECORD QUERY	30
7.2 EVENT RECORD QUERY	33
7.3 EVENT TYPE ANALYSIS	39
8 REGISTER LIST: HARMONICS	40
8.1 HARMONIC CONTENT DATA	40
9 REGISTER LIST: INVERTER INTERACTION	41
9.1 INVERTER COMMUNICATION HOST COMPUTER	41

10 REVISION HISTORY44

1 Modbus Communication


1.1 Overview

In networking communication, the wiring should be insulated from the strong electric cable or other strong electromagnetic environment. It is recommended to use a bus-type (T-type) network topology when wiring. Star or other connection methods are not recommended.

1.2 Modbus Protocol

MODBUS protocol uses a connection of master-slave response mode on a communication line. Firstly, the signal from the master is addressed to a terminal device (slave) with a unique address. Then, the response signal from the terminal device transmits to the master in the opposite direction, i.e., the signal transmits all communication data flow in two opposite directions on a single communication line (half-duplex working mode).

MODBUS protocol only allows the communication between the master (PC, PLC, etc.) and the terminal device, doesn't allow the data exchange between independent terminal devices. In this way, each terminal device will not occupy the communication line when they are initialized, but only responds to the signals which reach it.

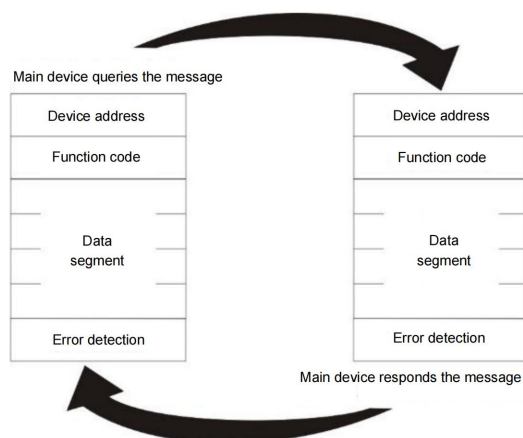

Master query: Query message frame including the device address code, function code, data information code, and check code. The device address code indicates the function code of the slave device which will be selected, and informs the selected slave device which function to execute, such as function code 03 or 04 requires the device to

read the register and return the content; The data segment contains the additional information of the function to be executed by the slave device. For example, in the read command, the additional information of the data segment contains the numbers of the registers from the one where read was started; The check code is used to verify the correctness of a frame and provide a way to verify the message content for the slave device. It adopts the calibration rule of CRC16.

Slave device response: If a normal response is generated from the slave device, there will be the address code, function code, data information code, and CRC16 check code in the response message. The data information code includes the data collected from the slave device, such as a register value or status. If an error occurs, it is agreed that the slave device never response.

1.3 Modbus_RTU Transmission Mode

The transmission mode is a series of independent data structures within a data frame and the limited rules used to transmit data. The transmission mode compatible with the MODBUS protocol - RTU mode is defined below. Each byte consists of 1 start bit, 8 data bits, (parity bit), 1 stop bit (when there is parity bit) or 2 stop bits (when there is no parity bit).

Structure of data frames: the message format.

Slave address	Function code	Command	CRC check
8-Bits	8-Bits	N×8-Bits	16-Bits Checking

Address code: At the beginning of the frame, it consists of a byte (8-bit binary code), in decimal is 0 ~ 255. Only 1 ~ 247 is used in our system, the other addresses are reserved. These bits indicate the address of the terminal device specified by the user, the device will receive master data that is connected to it. The address of each terminal device must be unique. The terminal being addressed will respond to a query that contains this address, and when the terminal sends back a response, the address data in the response from the slave device will inform the master that the terminal is communicating with it.

Function code: It informs what function the addressed terminal performs. The

following table lists the function codes supported by multi-functional electric devices, as well as their meanings and functions.

Data code: It contains the data necessary for a terminal to execute a particular function, or the data collected by a terminal response query. The contents of these data may be numeric values, reference addresses, or set values. For example, the function domain code informs the terminal to read from a register, the data domain needs to reflect the reading started from which register and how many data were read, and the slave device data code returns the contents including the data length and corresponding data.

Check code: the error check (CRC) domain occupies two bytes and contains a binary value of 16 bits. The CRC value is calculated by the transmission device and then attached to the data frame. The receiving device recalculates the CRC value when receiving the data, and compares it with the values received in the CRC domain. If these two values are not equal, an error occurs.

1.4 CRC Check Code Generation Process

The process to generate a CRC:

- 1) Preset a 16-bit register as FFFFH (hexadecimal, all 1), called CRC register.
- 2) The 8-bit of the first byte in the data frame and the low byte in the CRC register is calculated by XOR, and the result is saved back to the CRC register.
- 3) Shift the CRC register to the right one bit, the highest bit is 0, and the minimum is shifted out and detected.
- 4) The one removed in the previous step is 0, the third step is repeated (next shift): 1; the CRC register will do XOR operation with a preset fixed value (0A001H).
- 5) Repeat step 3 and step 4 up to 8 shifts to finish a complete 8 bits.
- 6) Repeat step 2 to step 5 to process the next 8 bits until all of the byte processing ends.
- 7) The final value of the CRC register is the value of CRC.

```
unsigned int CRC16(unsigned char *crc,unsigned char n,unsigned char after){
```

```
    unsigned char crc_lo=0xff,crc_hi=0xff,savelo,savehi;
    unsigned char crc_reg,crc_reg1;
    unsigned int nCRC;
        for(crc_reg=0;crc_reg<n;crc_reg++)
    {
        crc_lo^=*crc++;
        for(crc_reg1=0;crc_reg1<8;crc_reg1++)
        {
            savehi=crc_hi;
            savelo=crc_lo;
            crc_hi>>=1;
            crc_lo>>=1;
            if((savehi&0x01)==0x01)
                crc_lo|=0x80;
            if((savelo&0x01)==0x01)
            {
                crc_hi^=0xa0;
                crc_lo^=0x01;
            }
        }
    }
    if(after)
    {
        *crc++=crc_lo;//low byte first
        *crc=crc_hi;  //high byte last
    }
    nCRC=crc_hi;
    nCRC<<=8;
    nCRC|=crc_lo;
```

```

return nCRC;
}

```

1.5 Examples of Communication Messages

(0x03)

Request Frame			Response Frame		
Frame Format	Value/ Range	Bytes	Frame Format	Value/ Range	Bytes
Address Code	0~247	1	Address Code	0~247	1
Function Code	0x03	1	Function Code	0x03	1
Register Start Address	0~0xFFFF	2	Return Data Length	2*N	1
Number of Consecutive Registers N	1~125	2	Return Data	2~250	2*N
CRC Check		2	CRC Check		2

For frame data (except CRC) with 2 bytes, the high byte is first and low byte is last.

Write a single holding register, which is mainly used to configure parameters, occupying 8 bytes in total, and the return frame is consistent with the request frame. The register value is the write value.

Request Frame			Response Frame		
Frame Format	Value/ Range	Bytes	Frame Format	Value/ Range	Bytes
Address Code	0~247	1	Address Code	0~247	1
Function Code	0x06	1	Function Code	0x06	1
Register Address	0~0xFFFF	2	Register Address	0~0xFFFF	1
Register Value	0~0xFFFF	2	Register Value	0~0xFFFF	2
CRC Check		2	CRC Check		2

Write multiple consecutive register block data(0x10). A write cannot exceed 120

registers, that is, less than 240 bytes. The returned frame data field is the starting address and number of the registers being written.

Request Frame			Response Frame		
Frame Format	Value/ Range	Bytes	Frame Format	Value/ Range	Bytes
Address Code	0~247	1	Address Code	0~247	1
Function Code	0x10	1	Function Code	0x10	1
Register Start Address	0~0xFFFF	2	Register Start Address	0~0xFFFF	1
Register Number N	1~120	2	Register Number N	1~120	2
Data Length	2*N	1	CRC Check		2
Register Value	0~0xFFFF	2*N			
CRC Check		2			

2 Register List: Basic Electrical Parameters

MODBUS address information table (in decimal).

Note: All marked types are 16-bit integers, registers are holding registers, support 03, 06, 10 commands for operation, R stands for read, W stands for write, Dword type data are all high byte first, low byte last.

2.1 Basic Electrical Parameter Query

Basic Electrical Parameter Query (03 Function Code Reading)				Base Address(1000)		
Offset Address	Data Item	R/W	Range	Data Types	Byte Length	Unit/ Description
0	Phase A voltage	R	0~10000	word	2	0.1V
1	Phase B voltage	R	0~10000	word	2	0.1V
2	Phase C voltage	R	0~10000	word	2	0.1V
3	Residual current	R	0~100000	word	2	mA
4	Phase A current	R	0-1000000	Dword	4	0.1A
6	Phase B current	R	0-1000000	Dword	4	0.1A
8	Phase C current	R	0-1000000	Dword	4	0.1A
10	Phase A current direction	R	0:Grid flows to the user side	word	2	
			1: User side flows to the grid			
11	Phase B current direction	R	0:Grid flows to the user side	word	2	
			1: User side flows to the grid			
12	Phase C current direction	R	0:Grid flows to the user side	word	2	
			1: User side flows to the grid			
13	Switch Status	R	0: Off 1: On	word	2	-
14	Total active power Psum	R	-2,147,483,648~2,147,483,648	Long	4	0.01kW

16	Phase A active power P1	R	-2,147,483,648~2,147,483,648	Long	4	0.01kW
18	Phase B active power P2	R	-2,147,483,648~2,147,483,648	Long	4	0.01kW
20	Phase C active power P3	R	-2,147,483,648~2,147,483,648	long	4	0.01kW
22	Total reactive power Qsum	R	-2,147,483,648~2,147,483,648	long	4	0.01KVar
24	Phase A reactive power Q1	R	-2,147,483,648~2,147,483,648	long	4	0.01KVar
26	Phase B reactive power Q2	R	-2,147,483,648~2,147,483,648	long	4	0.01KVar
28	Phase C reactive power Q3	R	-2,147,483,648~2,147,483,648	long	4	0.01KVar
30	Total apparent power Ssum	R	0~4,294,967,296	word	4	0.01KVA
32	Phase A apparent power S1	R	0~4,294,967,296	word	4	0.01KVA
34	Phase B apparent power S2	R	0~4,294,967,296	word	4	0.01KVA
36	Phase C apparent power S3	R	0~4,294,967,296	word	4	0.01KVA
38	Total power factor PF	R	-1000~1000	interger	2	0.01
39	Phase A power factor PF1	R	-1000~1000	interger	2	0.01
40	Phase B power factor PF2	R	-1000~1000	interger	2	0.01
41	Phase C power factor PF3	R	-1000~1000	interger	2	0.01
42	Phase A grid frequency	R	4500~6500	word	2	0.01Hz
43	Phase B grid frequency	R	4500~6500	word	2	0.01Hz
44	Phase C grid frequency	R	4500~6500	word	2	0.01Hz

45	Voltage asymmetry	R	0~10000	word	2	0.01%
46	Current asymmetry	R	0~10000	word	2	0.01%
47	Running status (reserved)	R	/	interger	2	
48	Front-end phase A temperature	R	-4000~15000	word	2	0.01℃
49	Front-end phase B temperature	R	-4000~15000	word	2	0.01℃
50	Front-end phase C temperature	R	-4000~15000	word	2	0.01℃
51	Front-end phase N temperature	R	-4000~15000	word	2	0.01℃
52	Switch Status	R	0-1	word	2	1: ON 0: OFF
53	Running status word	R			4	
55	Rear end phase A voltage	R	0~100000	word	2	0.01V
56	Rear end phase B voltage	R	0~100000	word	2	0.01V
57	Rear end phase C voltage	R	0~100000	word	2	0.01V
58	Rear end voltage frequency	R	4500~6500	word	2	0.01Hz
59	Total forward active energy	R	0~4,294,967,296	Dword	4	0.01Kw/h
61	Phase A forward active energy	R	0-4,294,967,296	Dword	4	0.01Kw/h
63	Phase B forward active energy	R	0-4,294,967,296	Dword	4	0.01Kw/h
65	Phase C forward active energy	R	0-4,294,967,296	Dword	4	0.01Kw/h
67	Total reverse active energy	R	0-4,294,967,296	Dword	4	0.01Kw/h
69	Phase A reverse active energy	R	0-4,294,967,296	Dword	4	0.01Kw/h
71	Phase B reverse active energy	R	0-4,294,967,296	Dword	4	0.01Kw/h
73	Phase C reverse active energy	R	0-4,294,967,296	Dword	4	0.01Kw/h
75	Rear end phase A temperature	R	-4000~15000	word	2	0.01℃

76	Rear end phase B temperature	R	-4000~15000	word	2	0.01℃
77	Rear end phase C temperature	R	-4000~15000	word	2	0.01℃
78	Rear end phase N temperature	R	-4000~15000	word	2	0.01℃
79	Number of newly added event records	R	0-100	word	2	times, cleared to 0 after reading
80	Number of newly added alarm event records	R	0-10	word	2	times, cleared to 0 after reading
81	Configuration modification status	R	0-1	word	2	Status 0:Configurati on not modified 1:Configurati on modified Cleared after reading
82	Version update	R	0-9999	word	2	3333
83	Total forward reactive energy	R	0~4,294,967,296	Dword	4	0.01Kw/h Write 1 to Clear Energy
85	Phase A forward reactive energy	R	0-4,294,967,296	Dword	4	0.01Kw/h
87	Phase B forward reactive energy	R	0-4,294,967,296	Dword	4	0.01Kw/h
89	Phase C forward reactive energy	R	0-4,294,967,296	Dword	4	0.01Kw/h
91	Total reverse reactive energy	R	0-4,294,967,296	Dword	4	0.01Kw/h
93	Phase A revers reactive energy	R	0-4,294,967,296	Dword	4	0.01Kw/h
95	Phase B revers reactive energy	R	0-4,294,967,296	Dword	4	0.01Kw/h
97	Phase C revers reactive energy	R	0-4,294,967,296	Dword	4	0.01Kw/h

100	Modbus protocol version	R	0-9999	word	2	
101	Frame current	R	125/250/400/630/800/0000	Word	2	
102	Product type	R	1-10	Word	2	1:Convention al Metering 2:Electronic Metering Carrier 3:Primary and Secondary Products 4: New Metering 5:3P Reclosing
103	Total Forward Apparent Energy	R	0~4,294,967,296	Dword	4	0.01Kw/h Write 1 to Clear Energy
105	Phase A Forward Apparent Energy	R	0~4,294,967,296	Dword	4	0.01Kw/h
107	Phase B Forward Apparent Energy	R	0~4,294,967,296	Dword	4	0.01Kw/h
109	Phase C Forward Apparent Energy	R	0~4,294,967,296	Dword	4	0.01Kw/h
111	Total Reverse Apparent Energy	R	0~4,294,967,296	Dword	4	0.01Kw/h
113	Phase A Reverse Apparent Energy	R	0~4,294,967,296	Dword	4	0.01Kw/h
115	Phase B Reverse Apparent Energy	R	0~4,294,967,296	Dword	4	0.01Kw/h
117	Phase C Reverse Apparent Energy	R	0~4,294,967,296	Dword	4	0.01Kw/h

3 Register List: Basic Parameter

3.1 Basic Parameter Settings/Query

Basic Parameter Settings/Query (03,06,10 Function Code)					Base Address(2000)		
Offset Address	Data Item	R/W	Range	Data Type	Default Value	Byte Length	Unit/ Description
0	Power outage/ voltage loss value	R/W	200-1000	word	300	2	0.1V
1	Power outage/ voltage loss delay	R/W	0-10	word	0	2	S
2	Overvoltage value	R/W	2400-3450	word	2750	2	0.1V
3	Overvoltage delay	R/W	1-9999	word	2	2	S
4	Undervoltage value	R/W	1010-2200	word	1450	2	0.1V
5	Undervoltage delay	R/W	1-9999	word	4	2	S
6	Phase loss voltage	R/W	100-1000	word	300	2	0.1V
7	Phase loss delay	R/W	1-10	word	10	2	S
8	Recovery closing delay	R/W	0-100	word	5	2	S
9	Leakage action value	R/W	0-1000	word	500	2	mA. The leakage value is based on the actual

							product
10	Leakage non-driving time	R/W	0: No time delay 1:0.06S 2:0.1S 3:0.2S	word	1	2	The action time is based on the actual product
11	Leakage lock times	R/W	0-9	word	2	2	times
12	Overload Ir1 current level	R/W	0.4~1Ir	word	0 gear	2	A
13	Overload Ir1 delay	R/W	3-18	word	6	2	S
14	Short circuit Ir2 multiple gear	R/W	2-12	word	6	2	0.1 times
15	Short circuit Ir2 delay gear	R/W	100-10000	word	4	2	ms
16	Instantaneous Ir3 multiple gear	R/W	4-14	word	10	2	0.1 times
17	Device time-year	R/W	0-99	word	Real time value	2	
18	Device time-month	R/W	1-12	word	Real time value	2	
19	Device time-day	R/W	1-31	word	Real time value	2	

20	Device time-hour	R/W	0-23	word	Real time value	2	
21	Device time-minute	R/W	0-59	word	Real time value	2	
22	Device time-second	R/W	0-59	word	Real time value	2	
23	Time control 1 hour-minute	R/W	High Byte:00~23	word	Real time value	2	Valid in time control mode
24	Time control 2 hour-minute	R/W	Low Byte:00~59	word	Real time value	2	Valid in time control mode
25	Fee control effective time	R/W	0-500	word	5	2	Second (valid for pulse control signal)
26	Voltage imbalance delay	R/W	2-60	word	60	2	Second
27	Current imbalance delay	R/W	1-60	word	60	2	Second
28	Voltage imbalance	R/W	20-100	word	50	2	0.1%
29	Current imbalance	R/W	20-600	word	20	2	0.1%
31	Overfrequency threshold	R/W	0-150	word	20	2	0.1Hz Base 50Hz + overfrequencies threshold

32	Overfrequency delay	R/W	2-50	word	50	2	0.1S
33	Underfrequency threshold	R/W	0-150	word	30	2	0.1Hz Base 50Hz - underfreque ncy threshold
34	Underfrequency delay	R/W	2-50	word	50	2	0.1S
35	Temperature action value	R/W	600-1600	word	90	2	0.1°C
36	Temperature delay	R/W	1-9999	word	60	2	s
37	Maximum voltage allowed for closing at the back end	R/W	0-6000	word	3000	2	0.01V
38	Time zone	R/W	0-48	Word	40	2	0: UTC-12 1: UTC-11.5 24: UTC 0 47:UTC+11. 5 48:UTC+12
199	Overload alarm reset	R	0-1	word	0	2	Reset the overload alarm after writing 1

4 Register List: Control

4.1 Command Software Control

Software Remote Control (05 Function Code Reading)					Base Address (0000)	
Offset Address	Data Item		Range	Data Type	Byte Length	Unit/Description
1	Software closing	W	0~0XFFFF	WORD	1	Write 0xFF00
2	Software opening	W	0~0XFFFF	WORD	1	Write 0xFF00

4.2 Remote Control/Query

Remote Control/Query (03, 06, 10 Function Code)					Base Address(4500)		
Offset Address	Data Item	R/W	Range	Data Type	Default Value	Byte Length	Unit/Description
0	Preset opening time unit	R/W	2: minute	word	0	2	Write operations trigger re-timing
			3: hour				
1	Preset opening time	R/W	0-99	word	0	2	Write operations trigger re-timing
2	Preset opening timing	R	-1~2147483648	Long	-1	4	S (The countdown reaches 0 to perform the operation, and it changes to -1 after the operation is completed)
4	Preset closing time	R/W	2: minute	word	0	2	Write

	unit time unit		3: hour				operations trigger re-timing
5	Preset closing time	R/W	0-99	word	0	2	Write operations trigger re-timing
6	Preset closing timing	R	-1~2147483648	Long	-1	4	S (The countdown reaches 0 to perform the operation, and it changes to -1 after the operation is completed)
8	Preset mode unit	R/W	2: minute	word	0	2	Write operations trigger re-timing
			3: hour				
9	Preset mode time	R/W	0-99	word	0	2	Write operations trigger re-timing
10	Preset mode timing	R/W	-1~2147483648	word	-1	4	S (The countdown reaches 0 to perform the operation, and it changes to -1 after the operation is completed)
12	Preset a self-test unit	R/W	2: minute	word	0	2	Write operations trigger re-timing
			3: hour				

13	Preset a self-test time	R/W	0-99	word	0	2	Write operations trigger re-timing
14	Preset a self-test timing	R/W	-1~2147483648	word	-1	4	S (The countdown reaches 0 to perform the operation, and it changes to -1 after the operation is completed)

5 Register List: Energy

5.1 Energy Query

Energy Query (03 Function Code Reading)				Base Address(6000)		
Offset Address	Data Item	R/W	Range	Data Type	Byte Length	Unit/Description
0	Combined total active energy Ep-total	R	0-999999999	Dword	4	0.01kWh
2	Tariff 1-Combined total active energy Ep-total	R	0-999999999	Dword	4	0.01kWh
4	Tariff 2-Combined total active energy Ep-total	R	0-999999999	Dword	4	0.01kWh
6	Tariff 3-Combined total active energy Ep-total	R	0-999999999	Dword	4	0.01kWh
8	Tariff 4-Combined total active energy Ep-total	R	0-999999999	Dword	4	0.01kWh
10	Total forward active	R	0-999999999	Dword	4	0.01kWh

	energy Ep-net					
12	Tariff 1-Total forward active energy Ep-net	R	0-999999999	Dword	4	0.01kWh
14	Tariff 2-Total forward active energy Ep-net	R	0-999999999	Dword	4	0.01kWh
16	Tariff 3-Total forward active energy Ep-net	R	0-999999999	Dword	4	0.01kWh
18	Tariff 4-Total forward active energy Ep-net	R	0-999999999	Dword	4	0.01kWh
20	Total reverse active energy Ep-imp	R	0-999999999	Dword	4	0.01kWh
22	Tariff 1-Total reverse active energy Ep-imp	R	0-999999999	Dword	4	0.01kWh
24	Tariff 2-Total reverse active energy Ep-imp	R	0-999999999	Dword	4	0.01kWh
26	Tariff 3-Total reverse active energy Ep-imp	R	0-999999999	Dword	4	0.01kWh
28	Tariff 4-Total reverse active energy Ep-imp	R	0-999999999	Dword	4	0.01kWh
30	Total forward reactive energy (combined 1) Eq-total	R	0-999999999	Dword	4	0.01KVarh
32	Tariff 1-Total forward reactive energy (combined 1) Eq-total	R	0-999999999	Dword	4	0.01KVarh
34	Tariff 2-Total forward reactive energy (combined 1) Eq-total	R	0-999999999	Dword	4	0.01KVarh
36	Tariff 3-Total forward reactive energy (combined 1) Eq-total	R	0-999999999	Dword	4	0.01KVarh
38	Tariff 4-Total forward reactive energy (combined 1) Eq-total	R	0-999999999	Dword	4	0.01KVarh
40	Total reverse reactive energy (combined 1) Eq-total	R	0-999999999	Dword	4	0.01KVarh
42	Tariff 1-Total reverse reactive energy (combined 1) Eq-total	R	0-999999999	Dword	4	0.01KVarh
44	Tariff 2-Total reverse reactive energy	R	0-999999999	Dword	4	0.01KVarh

	(combined 1) Eq-total					
46	Tariff 3-Total reverse reactive energy (combined 1) Eq-total	R	0-99999999	Dword	4	0.01KVarh
48	Tariff 4-Total reverse reactive energy (combined 1) Eq-total	R	0-99999999	Dword	4	0.01KVarh
50	Capacitive release reactive energy Eq-exp	R	0-99999999	Dword	4	0.01KVarh
52	Tariff 1-Capacitive release reactive energy Eq-exp	R	0-99999999	Dword	4	0.01KVarh
54	Tariff 2-Capacitive release reactive energy Eq-exp	R	0-99999999	Dword	4	0.01KVarh
56	Tariff 3-Capacitive release reactive energy Eq-exp	R	0-99999999	Dword	4	0.01KVarh
58	Tariff 4-Capacitive release reactive energy Eq-exp	R	0-99999999	Dword	4	0.01KVarh
92	Phase A total active energy Ep-total	R	0-99999999	Dword	4	0.01kWh
94	Tariff 1-Phase A total active energy Ep-total	R	0-99999999	Dword	4	0.01kWh
96	Tariff 2-Phase A total active energy Ep-total	R	0-99999999	Dword	4	0.01kWh
98	Tariff 3-Phase A total active energy Ep-total	R	0-99999999	Dword	4	0.01kWh
100	Tariff 4-Phase A total active energy Ep-total	R	0-99999999	Dword	4	0.01kWh
102	Phase A forward active energy Ep-imp	R	0-99999999	Dword	4	0.01kWh
104	Tariff 1-Phase A forward active energy Ep-imp	R	0-99999999	Dword	4	0.01kWh
106	Tariff 2-Phase A forward active energy Ep-imp	R	0-99999999	Dword	4	0.01kWh
108	Tariff 3-Phase A forward active energy Ep-imp	R	0-99999999	Dword	4	0.01kWh

110	Tariff 4-Phase A forward active energy Ep-imp	R	0-999999999	Dword	4	0.01kWh
112	Phase A reverse active energy Ep-exp	R	0-999999999	Dword	4	0.01kWh
114	Tariff 1-Phase A reverse active energy Ep-exp	R	0-999999999	Dword	4	0.01kWh
116	Tariff 2-Phase A reverse active energy Ep-exp	R	0-999999999	Dword	4	0.01kWh
118	Tariff 3-Phase A reverse active energy Ep-exp	R	0-999999999	Dword	4	0.01kWh
120	Tariff 4-Phase A reverse active energy Ep-exp	R	0-999999999	Dword	4	0.01kWh
122	Phase A combination 1 reactive energy	R	0-999999999	Dword	4	0.01KVarh
124	Tariff 1-Phase A combination 1 reactive energy	R	0-999999999	Dword	4	0.01KVarh
126	Tariff 2-Phase A combination 1 reactive energy	R	0-999999999	Dword	4	0.01KVarh
128	Tariff 3-Phase A combination 1 reactive energy	R	0-999999999	Dword	4	0.01KVarh
130	Tariff 4-Phase A combination 1 reactive energy	R	0-999999999	Dword	4	0.01KVarh
132	Phase A combination 2 reactive energy	R	0-999999999	Dword	4	0.01KVarh
134	Tariff 1-Phase A combination 2 reactive energy	R	0-999999999	Dword	4	0.01KVarh
136	Tariff 2-Phase A combination 2 reactive energy	R	0-999999999	Dword	4	0.01KVarh
138	Tariff 3-Phase A combination 2 reactive energy	R	0-999999999	Dword	4	0.01KVarh
140	Tariff 4-Phase A	R	0-999999999	Dword	4	0.01KVarh

	combination 2 reactive energy					
142	Phase A inductive reactive energy Eq-imp	R	0-999999999	Dword	4	0.01KVarh
144	Tariff 1-Phase A inductive reactive energy Eq-imp	R	0-999999999	Dword	4	0.01KVarh
146	Tariff 2-Phase A inductive reactive energy Eq-imp	R	0-999999999	Dword	4	0.01KVarh
148	Tariff 3-Phase A inductive reactive energy Eq-imp	R	0-999999999	Dword	4	0.01KVarh
150	Tariff 4-Phase A inductive reactive energy Eq-imp	R	0-999999999	Dword	4	0.01KVarh
152	Phase A capacitive release reactive energy Eq-exp	R	0-999999999	Dword	4	0.01KVarh
154	Tariff 1-Phase A capacitive release reactive energy Eq-exp	R	0-999999999	Dword	4	0.01KVarh
156	Tariff 2-Phase A capacitive release reactive energy Eq-exp	R	0-999999999	Dword	4	0.01KVarh
158	Tariff 3-Phase A capacitive release reactive energy Eq-exp	R	0-999999999	Dword	4	0.01KVarh
160	Tariff 4-Phase A capacitive release reactive energy Eq-exp	R	0-999999999	Dword	4	0.01KVarh
192	Phase B total active energy Ep-total	R	0-999999999	Dword	4	0.01kWh
194	Tariff 1-Phase B total active energy Ep-total	R	0-999999999	Dword	4	0.01kWh
196	Tariff 2-Phase B total active energy Ep-total	R	0-999999999	Dword	4	0.01kWh
198	Tariff 3-Phase B total	R	0-999999999	Dword	4	0.01kWh

	active energy Ep-total					
200	Tariff 4-Phase B total active energy Ep-total	R	0-999999999	Dword	4	0.01kWh
202	Phase B forward active energy Ep-imp	R	0-999999999	Dword	4	0.01kWh
204	Tariff 1-Phase B forward active energy Ep-imp	R	0-999999999	Dword	4	0.01kWh
206	Tariff 2-Phase B forward active energy Ep-imp	R	0-999999999	Dword	4	0.01kWh
208	Tariff 3-Phase B forward active energy Ep-imp	R	0-999999999	Dword	4	0.01kWh
210	Tariff 4-Phase B forward active energy Ep-imp	R	0-999999999	Dword	4	0.01kWh
212	Phase B reverse active energy Ep-exp	R	0-999999999	Dword	4	0.01kWh
214	Tariff 1-Phase B reverse active energy Ep-exp	R	0-999999999	Dword	4	0.01kWh
216	Tariff 2-Phase B reverse active energy Ep-exp	R	0-999999999	Dword	4	0.01kWh
218	Tariff 3-Phase B reverse active energy Ep-exp	R	0-999999999	Dword	4	0.01kWh
220	Tariff 4-Phase B reverse active energy Ep-exp	R	0-999999999	Dword	4	0.01kWh
222	Phase B combination 1 reactive energy	R	0-999999999	Dword	4	0.01KVarh
224	Tariff 1-Phase B combination 1 reactive energy	R	0-999999999	Dword	4	0.01KVarh
226	Tariff 2-Phase B combination 1 reactive energy	R	0-999999999	Dword	4	0.01KVarh
228	Tariff 3-Phase B combination 1 reactive energy	R	0-999999999	Dword	4	0.01KVarh
230	Tariff 4-Phase B	R	0-999999999	Dword	4	0.01KVarh

	combination 1 reactive energy					
232	Phase B combination 2 reactive energy	R	0-999999999	Dword	4	0.01KVarh
234	Tariff 1-Phase B combination 2 reactive energy	R	0-999999999	Dword	4	0.01KVarh
236	Tariff 2-Phase B combination 2 reactive energy	R	0-999999999	Dword	4	0.01KVarh
238	Tariff 3-Phase B combination 2 reactive energy	R	0-999999999	Dword	4	0.01KVarh
240	Tariff 4-Phase B combination 2 reactive energy	R	0-999999999	Dword	4	0.01KVarh
242	Phase B inductive reactive energy Eq-imp	R	0-999999999	Dword	4	0.01KVarh
244	Tariff 1-Phase B inductive reactive energy Eq-imp	R	0-999999999	Dword	4	0.01KVarh
246	Tariff 2-Phase B inductive reactive energy Eq-imp	R	0-999999999	Dword	4	0.01KVarh
248	Tariff 3-Phase B inductive reactive energy Eq-imp	R	0-999999999	Dword	4	0.01KVarh
250	Tariff 4-Phase B inductive reactive energy Eq-imp	R	0-999999999	Dword	4	0.01KVarh
252	Phase B capacitive release reactive energy Eq-exp	R	0-999999999	Dword	4	0.01KVarh
254	Tariff 1-Phase B capacitive release reactive energy Eq-exp	R	0-999999999	Dword	4	0.01KVarh
256	Tariff 2-Phase B capacitive release reactive energy Eq-exp	R	0-999999999	Dword	4	0.01KVarh
258	Tariff 3-Phase B	R	0-999999999	Dword	4	0.01KVarh

	capacitive release reactive energy Eq-exp					
260	Tariff 4-Phase B capacitive release reactive energy Eq-exp	R	0-999999999	Dword	4	0.01KVarh
292	Phase B total active energy Ep-total	R	0-999999999	Dword	4	0.01kWh
294	Tariff 1-Phase C total active energy Ep-total	R	0-999999999	Dword	4	0.01kWh
296	Tariff 2-Phase C total active energy Ep-total	R	0-999999999	Dword	4	0.01kWh
298	Tariff 3-Phase C total active energy Ep-total	R	0-999999999	Dword	4	0.01kWh
300	Tariff 4-Phase C total active energy Ep-total	R	0-999999999	Dword	4	0.01kWh
302	Phase C forward active energy Ep-imp	R	0-999999999	Dword	4	0.01kWh
304	Tariff 1-Phase C forward active energy Ep-imp	R	0-999999999	Dword	4	0.01kWh
306	Tariff 2-Phase C forward active energy Ep-imp	R	0-999999999	Dword	4	0.01kWh
308	Tariff 3-Phase C forward active energy Ep-imp	R	0-999999999	Dword	4	0.01kWh
310	Tariff 4-Phase C forward active energy Ep-imp	R	0-999999999	Dword	4	0.01kWh
312	Phase C reverse active energy Ep-exp	R	0-999999999	Dword	4	0.01kWh
314	Tariff 1-Phase C reverse active energy Ep-exp	R	0-999999999	Dword	4	0.01kWh
316	Tariff 2-Phase C reverse active energy Ep-exp	R	0-999999999	Dword	4	0.01kWh
318	Tariff 3-Phase C reverse active energy Ep-exp	R	0-999999999	Dword	4	0.01kWh

320	Tariff 4-Phase C reverse active energy Ep-exp	R	0-999999999	Dword	4	0.01kWh
322	Phase C combination 1 reactive energy Ep-total	R	0-999999999	Dword	4	0.01kWh
324	Tariff 1-Phase C combination 1 reactive energy Ep-total	R	0-999999999	Dword	4	0.01kWh
326	Tariff 2-Phase C combination 1 reactive energy Ep-total	R	0-999999999	Dword	4	0.01kWh
328	Tariff 3-Phase C combination 1 reactive energy Ep-total	R	0-999999999	Dword	4	0.01kWh
330	Tariff 4-Phase C combination 1 reactive energy Ep-total	R	0-999999999	Dword	4	0.01kWh
332	Phase C combination 2 reactive energy Eq-net	R	0-999999999	Dword	4	0.01kWh
334	Tariff 1-Phase C combination 2 reactive energy Eq-net	R	0-999999999	Dword	4	0.01kWh
336	Tariff 2-Phase C combination 2 reactive energy Eq-net	R	0-999999999	Dword	4	0.01kWh
338	Tariff 3-Phase C combination 2 reactive energy Eq-net	R	0-999999999	Dword	4	0.01kWh
340	Tariff 4-Phase C combination 2 reactive energy Eq-net	R	0-999999999	Dword	4	0.01kWh
342	Phase C inductive reactive energy Eq-imp	R	0-999999999	Dword	4	0.01kWh
344	Tariff 1-Phase C inductive reactive energy Eq-imp	R	0-999999999	Dword	4	0.01kWh
346	Tariff 2-Phase C inductive reactive energy Eq-imp	R	0-999999999	Dword	4	0.01kWh
348	Tariff 3-Phase C	R	0-999999999	Dword	4	0.01kWh

	inductive reactive energy Eq-imp					
350	Tariff 4-Phase C inductive reactive energy Eq-imp	R	0-999999999	Dword	4	0.01kWh
352	Phase C capacitive release reactive energy Eq-exp	R	0-999999999	Dword	4	0.01kWh
354	Tariff 1-Phase C capacitive release reactive energy Eq-exp	R	0-999999999	Dword	4	0.01kWh
356	Tariff 2-Phase C capacitive release reactive energy Eq-exp	R	0-999999999	Dword	4	0.01kWh
358	Tariff 3-Phase C capacitive release reactive energy Eq-exp	R	0-999999999	Dword	4	0.01kWh
360	Tariff 4-Phase C capacitive release reactive energy Eq-exp	R	0-999999999	Dword	4	0.01kWh

5.2 Hourly Frozen Energy Query

Hourly Frozen Energy Query (03 Function Code Reading)				Base Address(7000)		
Offset Address	Data Item	R/W	Range	Data Type	Byte Length	Unit/ Description
0	Hourly froze time (year, month) (last time)	R		Word	2	
1	Hourly frozen time (day, hour) (last time)	R		Word	2	

2	Hourly frozen time (minutes, seconds) (last)	R		Word	2	
3	Hourly frozen total forward active energy	R	0~4294967295	Dword	4	0.01KVV/h
5	Hourly frozen total reverse active energy	R	0~4294967295	Dword	4	0.01KVV/h
7	Minute Frozen Total Energy (Lower Word First, Higher Word Second)	R	0x00000000-0x9999 9999	Dword	4	
9	Minute Frozen Total Energy Index Query Settings	R/W	0~1920	Word	2	数据格式 XXXXXX.XX 2 位小数 码 制 BCD 0.01KVV/h

6 Register List: Protection

6.1 Function Selection Settings/Query

Function Selection Setting / Query (03, 06, 10 Function Code)					Basic Address (3000)		
Offset Address	Data Item	Read / Write	Value Range	Data Type	Default Value	Byte Length	Unit / Description
0	Overvoltage protection	R/W	0~3	word	0	2	0: Off 1: Alarm 2: Trip 3: Alarm & Trip
1	Undervoltage protection	R/W	0~3	word	0	2	0: Off 1: Alarm 2: Trip 3: Alarm & Trip

2	Phase loss protection	R/W	0~3	word	0	2	0: Off 1: Alarm 2: Trip 3: Alarm & Trip
3	Power off protection	R/W	0~1	word	0	2	0: Off 1: Trip
4	Neutral loss protection	R/W	0~3	word	0	2	0: Off 1: Alarm 2: Trip 3: Alarm & Trip
5	Leakage protection	R/W	0~2	word	2	2	0: Off 1: Alarm 2: Trip 0: Trip 1: 24-hour Alarm 2: Alarm Protection types vary depending on protocol.
6	Leakage mutation protection	R/W	0~1	word	0	2	0: Off 1: Trip
7	Overload protection	R/W	0~3	word	2	2	0: Off 1: Alarm 2: Trip 3: Alarm & Trip
8	Short circuit protection	R/W	0~3	word	2	2	0: Off 1: Alarm 2: Trip 3: Alarm & Trip
9	Instantaneous protection	R/W	0~3	word	2	2	0: Off 1: Alarm 2: Trip 3: Alarm & Trip
10	Voltage imbalance protection	R/W	0~2	word	0	2	0: Off 1: Alarm 2: Trip
11	Current imbalance protection	R/W	0~2	word	0	2	0: Off 1: Alarm 2: Trip
12	Remote control allowed	R/W	0-1	word	1	2	0:Forbid 1: Allow
13	Working mode	R/W	0-2	word	0	2	0: Normal mode 1: Time control mode 2: Fee control mode
14	Gear return	R/W	0-1	word	1	2	0:Forbid 1: Allow
15	Alarm allowed	R/W	0-1	word	1	2	0:Forbid 1: Allow
16	Auto reclosing allowed	R/W	0-1	word	1	2	0:Forbid 1: Allow
17	Timed trial trip	R/W	0-1	word	1	2	0:Forbid 1: Allow
18							Null
19	Over frequency function	R/W	0~2	word	0	0	0: Off 1: Alarm 2: Trip
20	Under frequency function	R/W	0~2	word	0	0	0: Off 1: Alarm 2: Trip

21	Island function	R/W	0~2	word	0	0	0: Off 1: Alarm 2: Trip
22	Current harmonic protection	R/W	0~2	word	0	0	0: Off 1: Alarm 2: Trip
23	Temperature protection	R/W	0~2	word	0	0	0: Off 1: Alarm 2: Trip
500-519	Device serial number	R/W		word			

7 Register List: Record Query

7.1 Cumulative Record Query

Cumulative Record Query (03 Read Function Code)				Basic Address (5000)		
Offset Address	Data Item	Read/Write	Value Range	Data Type	Byte Length	Unit/Description
0	Total number of data clearing times	R/W	0~4294967295	Dword	4	times/write 0x00001234 to clear event data
2	Total trip time	R	0~65535	word	2	times
3	Residual current blocking trip	R	0~65535	word	2	times
4	Residual current protection trip	R	0~65535	word	2	times
5	Overload protection trip times	R	0~65535	word	2	times
6	Overvoltage protection trip times	R	0~65535	word	2	times
7	Manual trip times	R	0~65535	word	2	times
8	Neutral loss trip protection times	R	0~65535	word	2	times
9	Earth leakage test trip times (remote, button)	R	0~65535	word	2	times
10	Short circuit short delay trip	R	0~65535	word	2	times

11	Short circuit instantaneous trip times	R	0~65535	word	2	times
12	Under voltage protection trip times	R	0~65535	word	2	times
13	Phase loss protection trip times	R	0~65535	word	2	times
14	Total operation time	R	0~4294967295	Dword	4	minutes
16	Total number of data clearing times	R	0~4294967295	Dword	4	times/write 0x00001234 to clear event data
18	Total trip times	R	0~65535	word	2	times
19	Overvoltage protection trip times	R	0~65535	word	2	times
20	Undervoltage protection trip times	R	0~65535	word	2	times
21	Phase loss protection trip times	R	0~65535	word	2	times
22	Power-off protection trip times	R	0~65535	word	2	times
23	Leakage protection trip times	R	0~65535	word	2	times
24	Leakage mutation protection trip times	R	0~65535	word	2	times
25	Leakage protection lockout times	R	0~65535	word	2	times
26	Neutral loss protection trip times	R	0~65535	word	2	times
27	Communication trip times	R	0~65535	word	2	times
28	Communication	R	0~65535	word	2	times

	closing times					
29	Remote trip times	R	0~65535	word	2	times
30	Remote closing times	R	0~65535	word	2	times
31	Automatic closing times	R	0~65535	word	2	times
32	Manual closing times	R	0~65535	word	2	times
33	Button closing times	R	0~65535	word	2	times
34	Button lockout times	R	0~65535	word	2	times
35	Mechanical lockout times	R	0~65535	word	2	times
36	Timed trial jump times	R	0~65535	word	2	times
37	Overload protection lockout times	R	0~65535	word	2	times
38	Short circuit short delay protection lockout times	R	0~65535	word	2	times
39	Instantaneous protection lockout times	R	0~65535	word	2	times
40	Number of closing failures	R	0~65535	word	2	times
41	Number of opening failures	R	0~65535	word	2	times
42	Number of communication tests	R	0~65535	word	2	times
43	System power outage times	R	0~65535	word	2	times
44	System power-on times	R	0~65535	word	2	times
45	Time-controlled closing times	R	0~65535	word	2	times
46	Time-controlled tripping times	R	0~65535	word	2	times
47	Voltage	R	0~65535	word	2	times

	imbalance protection trip times					
48	Current imbalance protection trip times	R	0~65535	word	2	times
49	Number of arrears lockouts	R	0~65535	word	2	times
50	High temperature protection lockout times	R	0~65535	word	2	times
51	Leakage test times	R	0~65535	word	2	times
52	Phase sequence error protection trip times	R	0~65535	word	2	times
53	Underfrequency protection trip times	R	0~65535	word	2	times
54	Overfrequency protection trip times	R	0~65535	word	2	times
55	Island protection trip times	R	0~65535	word	2	times
56	Current harmonic protection trip times	R	0~65535	word	2	times
57	Overvoltage lockout times	R	0~65535	word	2	times
58	Undervoltage lockout times	R	0~65535	word	2	times
59	Phase loss lockout times	R	0~65535	word	2	times

7.2 Event Record Query

Event Record Query (03, 06 Function Code)				Basic Address (4000)		
Offset	Data Item	Read/Writ	Value Range	Data Type	Byte	Unit / Description

Address		e			Length	
0	Total number of events	R	0~100	word	2	Times/including closing, opening, abnormal and other events
1	Query index	R/W	1~100	word	2	Times / query a certain record and write the register. New records are automatically updated.
2	Event type	R	0~65535	word	2	Please refer to the event type resolution table
3	Event - year	R	0~65535	word	2	Year
4	Event - month	R	0~65535	word	2	Month
5	Event - day	R	0~65535	word	2	Day
6	Event - hour	R	0~65535	word	2	Hour
7	Event - minute	R	0~65535	word	2	Minute
8	Event - second	R	0~65535	word	2	Second
9	Event phase information	R	0~65535	word	2	Bit0: Phase A Bit1: Phase B Bit2: Phase C Bit3: Phase N Bit4: Voltage Bit5: Current Bit6: Leakage Bit7: Temperature
10	Event voltage A	R	0~65535	word	2	0.1V
11	Event voltage B	R	0~65535	word	2	0.1V
12	Event voltage C	R	0~65535	word	2	0.1V
13	Event current A	R	0~4294967295	Dword	4	0.1A
15	Event current B	R	0~4294967295	Dword	4	0.1A
17	Event current C	R	0~4294967295	Dword	4	0.1A
19	Event leakage	R	0~65535	word	2	mA

20	Alarm event status	R	0~1	word	2	0 recovery 1 occurrence
21	Total number of alarm events	R	0~10	word	2	Times/alarm events
22	Query alarm event index	R/W	1~10	word	2	Times/query a certain record and write the register. New records are automatically updated.
23	Alarm event type	R	0~65535	word	2	Please refer to the event type resolution table
24	Alarm event-year	R	0~65535	word	2	Year
25	Alarm event-month	R	0~65535	word	2	Month
26	Alarm event-day	R	0~65535	word	2	Day
27	Alarm event-hour	R	0~65535	word	2	Hour
28	Alarm event-minute	R	0~65535	word	2	Minute
29	Alarm event-second	R	0~65535	word	2	Second
30	Alarm event phase information	R	0~65535	word	2	Bit0: Phase A Bit1: Phase B Bit2: Phase C Bit3: Phase N Bit4: Voltage Bit5: Current Bit6: Leakage Bit7: Temperature
31	Alarm event voltage A	R	0~65535	word	2	0.1V
32	Alarm event voltage B	R	0~65535	word	2	0.1V
33	Alarm event voltage C	R	0~65535	word	2	0.1V
34	Alarm event	R	0~429496729	Dword	4	0.1A

	current A		5			
36	Alarm event current B	R	0~429496729 5	Dword	4	0.1A
38	Alarm event current C	R	0~429496729 5	Dword	4	0.1A
40	Alarm event leakage	R	0~65535	word	2	mA
41	Event front-end temperature A status	R	0~1	word	2	0: Offline 1: Online
42	Event front-end temperature A	R	-4000~15000	word	2	0.01℃
43	Event front-end temperature B status	R	0~1	word	2	0: Offline 1: Online
44	Event front-end temperature B	R	-4000~15000	word	2	0.01℃
45	Event front-end temperature C status	R	0~1	word	2	0: Offline 1: Online
46	Event front-end temperature C	R	-4000~15000	word	2	0.01℃
47	Event front-end temperature N status	R	0~1	word	2	0: Offline 1: Online
48	Event front-end temperature N	R	-4000~15000	word	2	0.01℃
49	Event front-end temperature A status	R	0~1	word	2	0: Offline 1: Online

50	Event back-end temperature A	R	-4000~15000	word	2	0.01℃
51	Event front-end temperature B status	R	0~1	word	2	0: Offline 1: Online
52	Event back-end temperature B	R	-4000~15000	word	2	0.01℃
53	Event front-end temperature C status	R	0~1	word	2	0: Offline 1: Online
54	Event back-end temperature C	R	-4000~15000	word	2	0.01℃
55	Event front-end temperature N status	R	0~1	word	2	0: Offline 1: Online
56	Event back-end temperature N	R	-4000~15000	word	2	0.01℃
57	Alarm front-end temperature A status	R	0~1	word	2	0: Offline 1: Online
58	Alarm front-end temperature A	R	-4000~15000	word	2	0.01℃
59	Alarm front-end temperature B status	R	0~1	word	2	0: Offline 1: Online
60	Alarm front-end temperature	R	-4000~15000	word	2	0.01℃

	B					
61	Alarm front-end temperature C status	R	0~1	word	2	0: Offline 1: Online
62	Alarm front-end temperature C	R	-4000~15000	word	2	0.01℃
63	Alarm front-end temperature N status	R	0~1	word	2	0: Offline 1: Online
64	Alarm front-end temperature N	R	-4000~15000	word	2	0.01℃
65	Alarm back-end temperature A status	R	0~1	word	2	0: Offline 1: Online
66	Alarm back-end temperature A	R	-4000~15000	word	2	0.01℃
67	Alarm back-end temperature B status	R	0~1	word	2	0: Offline 1: Online
68	Alarm back-end temperature B	R	-4000~15000	word	2	0.01℃
69	Alarm back-end temperature C status	R	0~1	word	2	0: Offline 1: Online
70	Alarm back-end temperature C	R	-4000~15000	word	2	0.01℃
71	Alarm back-end	R	0~1	word	2	0: Offline 1: Online

	temperature N status					
72	Alarm back-end temperature N	R	-4000~15000	word	2	0.01℃

7.3 Event Type Analysis

Event Type Analysis Table		
Event Value	Event Name	Description
0	"Closing standby"	
1	"Overvoltage trip"	
2	"Undervoltage trip"	
3	"Phase loss trip"	
4	"Power off and trip"	
5		
6		
7		
8	"Neutral loss trip"	
9	"Communication lock"	
10	"Communication closing"	
11	"Remote lock"	
12	"Remote closing"	
13	"Automatic closing"	
14	"Manual closing"	
15	"Button closing"	
16	"Button lock"	
17	"Mechanical lock"	
18	"Timed trial trip"	
19	"Overload lock"	

20	"Short circuit lock"	
21	"Instantaneous lock"	
22	"Failed to close"	
23	"Failed to open"	
24	"Communication trial trip"	
25	"System power off"	
26	"System power on"	
27	"Time-controlled closing"	
28	"Time-controlled opening"	
29	"Voltage imbalance"	
30	"Current imbalance"	
31	"Arrears lock"	
32	"High temperature lock"	
33		
34	"Phase sequence error"	
35	"Underfrequency protection"	
36	"Over frequency protection"	

8 Register List: Harmonics

8.1 Harmonic Content Data

Harmonic Content Data (03 Function Code Reading)				Basic Address (10000)		
Offset Address	Data Item	Read/Write	Value Range	Data Type	Byte Length	Unit / Description
0	Total harmonic content of phase A voltage	R	0~9999	word	2	0.01%
1~31	The 1st to 31st harmonic content of phase A voltage	R	0~9999	word	2	0.01%

100	Total harmonic content of phase B voltage	R	0~9999	word	2	0.01%
101~131	The 1st to 31st harmonic content of phase B voltage	R	0~9999	word	2	0.01%
200	Total harmonic content of phase C voltage	R	0~9999	word	2	0.01%
201~231	The 1st to 31st harmonic content of phase C voltage	R	0~9999	word	2	0.01%
300	Total harmonic content of phase A current	R	0~9999	word	2	0.01%
301~331	The 1st to 31st harmonic content of phase A current	R	0~9999	word	2	0.01%
400	Total harmonic content of phase B current	R	0~9999	word	2	0.01%
401~431	The 1st to 31st harmonic content of phase B current	R	0~9999	word	2	0.01%
500	Total harmonic content of phase C current	R	0~9999	word	2	0.01%
501~531	The 1st to 31st harmonic content of phase C current	R	0~9999	word	2	0.01%

9 Register List: Inverter Interaction

9.1 Inverter Communication Host Computer

Inverter Communication Host Computer (Function Codes 03, 06, 10) (Non-Standard)				Basic Address(15000)		
Offset Address	Data Item	Read / Write	Gain (Scale Factor)	Data Type	Byte Length	Unit/Description
0	Voltage 1	R	10	uint	4	V

2	Voltage 2	R	10	uint	4	V
4	Voltage 3	R	10	uint	4	V
6	Current 1	R	10	int	4	A
8	Current 2	R	10	int	4	A
10	Current 3	R	10	int	4	A
12	Active Power	R	10	uint	4	KW
14	Reactive Power	R	10	int	4	KVar
16	Power Factor	R	10	int	4	
18	Frequency	R	100	uint	4	Hz
20	PV1Voltage	R	10	uint	4	V
22	PV2Voltage	R	10	uint	4	V
24	PV3Voltage	R	10	uint	4	V
26	PV1Current	R	10	int	4	A
28	PV2Current	R	10	int	4	A
30	PV3Current	R	10	int	4	A
32	Operating Status	R	1	uint	4	
34	Rated Reactive Power	R	10	int	4	KVar
36	Rated Active Power	R	10	uint	4	kW
38	Output Type	R	1	uint	4	
40	Inverter Efficiency	R	10	uint	4	
42	Daily Power Generation	R	10	uint	4	
44	Total Power Generation	R	10	uint	4	
46	Fault Code	R	1	uint	4	
48	Actual Value of Limited Active Power	WR	10	uint	4	
50	Actual Value of Limited Reactive Power	WR	10	int	4	

52	Power Factor Settings	WR	100	int	4	
54	Percentage of Active Power	WR	100	uint	4	
56	Percentage of Reactive Power	WR	100	int	4	
58	Active Power Control	WR	1	uint	4	
60	Reactive Power Control	WR	1	uint	4	
62	Product Power On/Off	WR	1	uint	4	0: Shutdown 1: Startup
Reserved 63 - 100						
100	Delete Current Active Table	WO	1	uint	4	1: Delete
102	Current Protocol	R		ASCII	20	
112	Serial Number	R		ASCII	30	
127	Model Name	R		ASCII	30	
142	Link Online Status	R	1	uint	4	1: Online
Reserved 144 - 500						
500	Equipment Selection	WR	1	uint	4	Multi-device Support Not Implemented
502	Number of Database Tables	R	1	uint	4	
504	Select and Use Database Tables	WO	1	uint	4	Select and use tables from the database; the system will disable automatic identification.

506	Automatic Identification	WR	1	uint	2	
510	Modbus Address	WR	1	uint	2	0 – 247 Collector: This setting will disable automatic identification
511	Baud Rate	WR	1	uint	2	0: 4800 1: 9600 2: 19200 3: 115200 Collector: This setting will disable automatic identification
512	Parity Check	WR	1	uint	2	0: Even Parity 1: Odd Parity 2: No Parity Collector: This setting will disable automatic identification
513	System Status	WR	1	uint	2	Collector Status 1: Standby 2: Connection Detection 3: Automatic Identification 4: Connected
Reserved 506 - 1000						
1000	Name of Table 1	R		ASCII	20	
1010	Name of Table 2	R		ASCII	20	
1020 – 1400 Table 3 – Table 40						

10 Revision History

Version	Description	Date	Revised by
v1.003	Firs edition	2024/11/13	
