



Shanghai Matis Electric Co.Ltd

CE TEST REPORT

Prepared For :	Shanghai Matis Electric Co.Ltd Room318-320, No.83,West Huanghu Road, Pudong, Shanghai, China 201306
Product Name:	Multi Circuit Power Monitoring System
Trade Name:	Matis
Model :	Starline -V10Starline- M10/20/30/40+ Starline-E10/E11/E31+ CTO100/CTO/200/CTO400/CTO600
Additional model :	/
Prepared By :	BST Testing (Shenzhen) Co., Ltd. No.7, New Era Industrial Zone, Guantian, Bao'an District, Shenzhen, Guangdong, China
Test Date:	Jul.06,2025 To Jul.09,2025
Date of Report :	Jul.09,2025
Report No.:	XDAK223250958071411DR



BAb7xc

9FYDks

EN 62053-21:2003, Electricity metering equipment (a.c.) –Particular requirements Part 21: Static meters for active energy (classes 1 and 2)

Test Report Content

This test report consists of:

* Main report

General information:

The test results presented in this report relate only to the object tested and information given from applicant or manufacturer.

Test case verdicts:

P=Pass, F=Fail, N/A=Not applicable. Placed in the column marked “Verdict”.

This is a Computer generated Test Report.

×Information written in “Italic” or “Regular and bold” font style is a part of this “Test Report Form”

CONTENT FOR ADDITIONAL INFORMATION

EN 62053-21:2003		
Clause	Requirements	Verdict
1	<p>Scope</p> <p>This part of IEC 62053 applies only to newly manufactured static watt-hour meters of accuracy classes 1 and 2, for the measurement of alternating current electrical active energy in 50 Hz or 60 Hz networks and it applies to their type tests only.</p> <p>It applies only to static watt-hour meters for indoor and outdoor application consisting of a measuring element and register(s) enclosed together in a meter case. It also applies to operation indicator(s) and test output(s). If the meter has a measuring element for more than one type of energy (multi-energy meters), or when other functional elements, like maximum demand indicators, electronic tariff registers, time switches, ripple control receivers, data communication interfaces, etc. are enclosed in the meter case, then the relevant standards for these elements also apply.</p> <p>It does not apply to:</p> <ul style="list-style-type: none"> – watt-hour meters where the voltage across the connection terminals exceeds 600 V (line-to-line voltage for meters for polyphase systems); – portable meters; – data interfaces to the register of the meter; – reference meters. <p>Regarding acceptance tests, a basic guideline is given in IEC 61 358.</p> <p>The dependability aspect is covered by the standards of the IEC 62059 series.</p>	P
2	Normative references	P
3	Terms and definitions	P
4	Standard electrical values	
	The values given in IEC 62052-1 1 apply.	P
5	Mechanical requirements	
	The requirements of IEC 62052-1 1 apply.	P
6	Climatic conditions	
	The conditions given in IEC 62052-1 1 apply.	P
7	Electrical requirements	
	In addition to the electrical requirements in IEC 62052-1 1 , meters shall fulfil the following requirements.	P
7.1	Power consumption	
	The power consumption in the voltage and current circuit shall be determined at reference conditions given in 8.5 by any suitable method. The overall maximum error of the measurement of the power consumption shall not exceed 5 %	P
7.1.1	Voltage circuits	
	The active and apparent power consumption in each voltage circuit of a meter at reference voltage, reference temperature and reference frequency shall not exceed the values shown in Table 1 .	N

EN 62053-21:2003		
Clause	Requirements	Verdict
7.1.2	Current circuits	
	The apparent power taken by each current circuit of a direct connected meter at basic current, reference frequency and reference temperature shall not exceed the values shown in Table 2.	P
	The apparent power taken by each current circuit of a meter connected through a current transformer shall not exceed the value shown in Table 2 at a current value that equals the rated secondary current of the corresponding transformer at reference temperature and reference frequency of the meter.	P
7.2	Influence of short-time overcurrents	
	Short-time overcurrents shall not damage the meter. The meter shall perform correctly when back to its initial working condition and the variation of error shall not exceed the values shown in Table 3.	P
	The test circuit shall be practically non-inductive and the test shall be performed for polyphase meters phase-by-phase.	N
	After the application of the short-time overcurrent with the voltage maintained at the terminals, the meter shall be allowed to return to the initial temperature with the voltage circuit(s) energized (about 1 h).	P
	a) Meter for direct connection The meter shall be able to carry a short-time overcurrent of 30 I max with a relative tolerance of +0 % to -10 % for one half-cycle at rated frequency.	P
	b) Meter for connection through current transformer The meter shall be able to carry for 0,5 s a current equal to 20 I max with a relative tolerance of +0 % to -10 %.	P
7.3	Influence of self-heating	
	The variation of error due to self-heating shall not exceed the values given in Table 4.	P
	The test shall be carried out as follows: after the voltage circuits have been energized at reference voltage for at least 2 h for class 1 and 1 h for class 2, without any current in the current circuits, the maximum current shall be applied to the current circuits. The meter error shall be measured at unity power factor immediately after the current is applied and then at intervals short enough to allow a correct drawing to be made of the curve of error variation as a function of time. The test shall be carried out for at least 1 h, and in any event until the variation of error during 20 min does not exceed 0,2 %.	P
	The same test shall then be carried out at 0,5 (inductive) power factor.	P
	The cable to be used for energizing the meter shall have a length of 1 m and a cross-section to ensure that the current density is between 3,2 A/mm ² and 4 A/mm ² .	P
7.4	AC voltage test	
	The test voltage shall be substantially sinusoidal, having a frequency between 45 Hz and 65 Hz, and applied for 1 min. The power source shall be capable of supplying at least 500 VA.	P

EN 62053-21:2003		
Clause	Requirements	Verdict
	During the tests relative to earth, the auxiliary circuits with reference voltage equal to or below 40 V shall be connected to earth.	P
	All these tests shall be carried out with the case closed and the cover and terminal covers in place.	P
	During this test, no flashover, disruptive discharge or puncture shall occur.	P
8	Accuracy requirements	
	Tests and test conditions given in IEC 62052-1 1 apply.	P
8.1	Limits of error due to variation of the current	
	If the meter is designed for the measurement of energy in both directions, the values in Table 6 and Table 7 shall apply for each direction.	N
	The difference between the percentage error when the meter is carrying a single-phase load and a balanced polyphase load at basic current I_b and unity power factor for direct connected meters, respectively at rated current I_n and unity power factor for transformer operated meters, shall not exceed 1,5 % and 2,5 % for meters of classes 1 and 2 respectively.	P
8.2	Limits of error due to influence quantities	
	The additional percentage error due to the change of influence quantities with respect to reference conditions, as given in 8.5, shall not exceed the limits for the relevant accuracy class given in Table 8.	P
8.2.1	Accuracy test in the presence of harmonics	
	<p>Test conditions:</p> <ul style="list-style-type: none"> – fundamental frequency current: $I_1 = 0,5 I_{max}$ – fundamental frequency voltage: $U_1 = U_n$ – fundamental frequency power factor: 1 – content of 5 th harmonic voltage: $U_5 = 10\% \text{ of } U_n$ – content of 5 th harmonic current: $I_5 = 40\% \text{ of fundamental current}$ – harmonic power factor: 1 – fundamental and harmonic voltages are in phase, at positive zero crossing. 	P
	Resulting harmonic power due to the 5 th harmonic is $P_5 = 0,1 U_1 \times 0,4 I_1 = 0,04 P_1$ or total active power = 1,04 P_1 (fundamental + harmonics).	P
8.2.2	Tests of the influence of odd harmonics and sub-harmonics	
	The tests of the influence of odd harmonics and sub-harmonics shall be made with the circuit shown in Figure A.4 or with other equipment able to generate the required waveforms, and the current waveforms as shown Figure A.5 and Figure A.7 respectively	P
	The variation in percentage error when the meter is subjected to the test waveform given in Figure A.5 and Figure A.7 and when it is subjected to the reference waveform shall not exceed the limits of variation given	P
8.2.3	Tests of the influence of d.c. and even harmonics	
	The tests of the influence of direct current and even harmonics shall be made with the circuit shown in Figure A.1 or with other equipment able to generate the required waveforms, and the current waveforms as shown in Figure A.2.	P

EN 62053-21:2003		
Clause	Requirements	Verdict
	The variation in percentage error when the meter is subjected to the test waveform given in Figure A.2 and when it is subjected to the reference waveform shall not exceed the limits of variation given in Table 8.	P
8.2.4	Continuous magnetic induction of external origin	
	The continuous magnetic induction may be obtained by using the electromagnet according to annex B, energized with a d.c. current. This magnetic field shall be applied to all accessible surfaces of the meter when it is mounted as for normal use. The value of the magneto-motive force applied shall be 1 000 At (ampere-turns).	P
8.3	Test of starting and no-load condition	
	For these tests, the conditions and the values of the influence quantities shall be as stated in 8.5 except for any changes specified below.	P
8.3.1	Initial start-up of the meter	
	The meter shall be functional within 5 s after the reference voltage is applied to the meter terminals.	P
8.3.2	Test of no-load condition	
	When the voltage is applied with no current flowing in the current circuit, the test output of the meter shall not produce more than one pulse.	N
	For this test, the current circuit shall be open-circuit and a voltage of 1 1 5 % of the reference voltage shall be applied to the voltage circuits.	P
	For transformer-operated meters with primary or half-primary registers, the constant k shall correspond to the secondary values (voltage and currents).	P
8.3.3	Starting	
	The meter shall start and continue to register at the starting current values (and in case of polyphase meters, with balanced load) shown in Table 9.	P
	If the meter is designed for the measurement of energy in both directions, then this test shall be applied with energy flowing in each direction.	P
8.4	Meter constant	
	The relation between the test output and the indication in the display shall comply with the marking on the name-plate.	P
8.5	Accuracy test conditions	
	<p>To test the accuracy requirements, the following test conditions shall be maintained:</p> <ul style="list-style-type: none"> a) the meter shall be tested in its case with the cover in position; all parts intended to be earthed shall be earthed; b) before any test is made, the circuits shall have been energized for a time sufficient to reach thermal stability; c) in addition, for polyphase meters: <ul style="list-style-type: none"> – the phase sequence shall be as marked on the diagram of connections; – the voltages and currents shall be substantially balanced (see Table 10). 	P

EN 62053-21:2003		
Clause	Requirements	Verdict
	d) the reference conditions are given in Table 1 1 ; e) for requirements regarding test stations, see IEC 60736.	
8.6	Interpretation of test results	
	Certain test results may fall outside the limits indicated in Tables 6 and 7, owing to uncertainties of measurements and other parameters capable of influencing the measurements. However, if by one displacement of the zero line parallel to itself by no more than the limits indicated in Table 1 2, all the test results are brought within the limits indicated in Tables 6 and 7, the meter type shall be considered acceptable.	P

Product Photos

Fig. 1

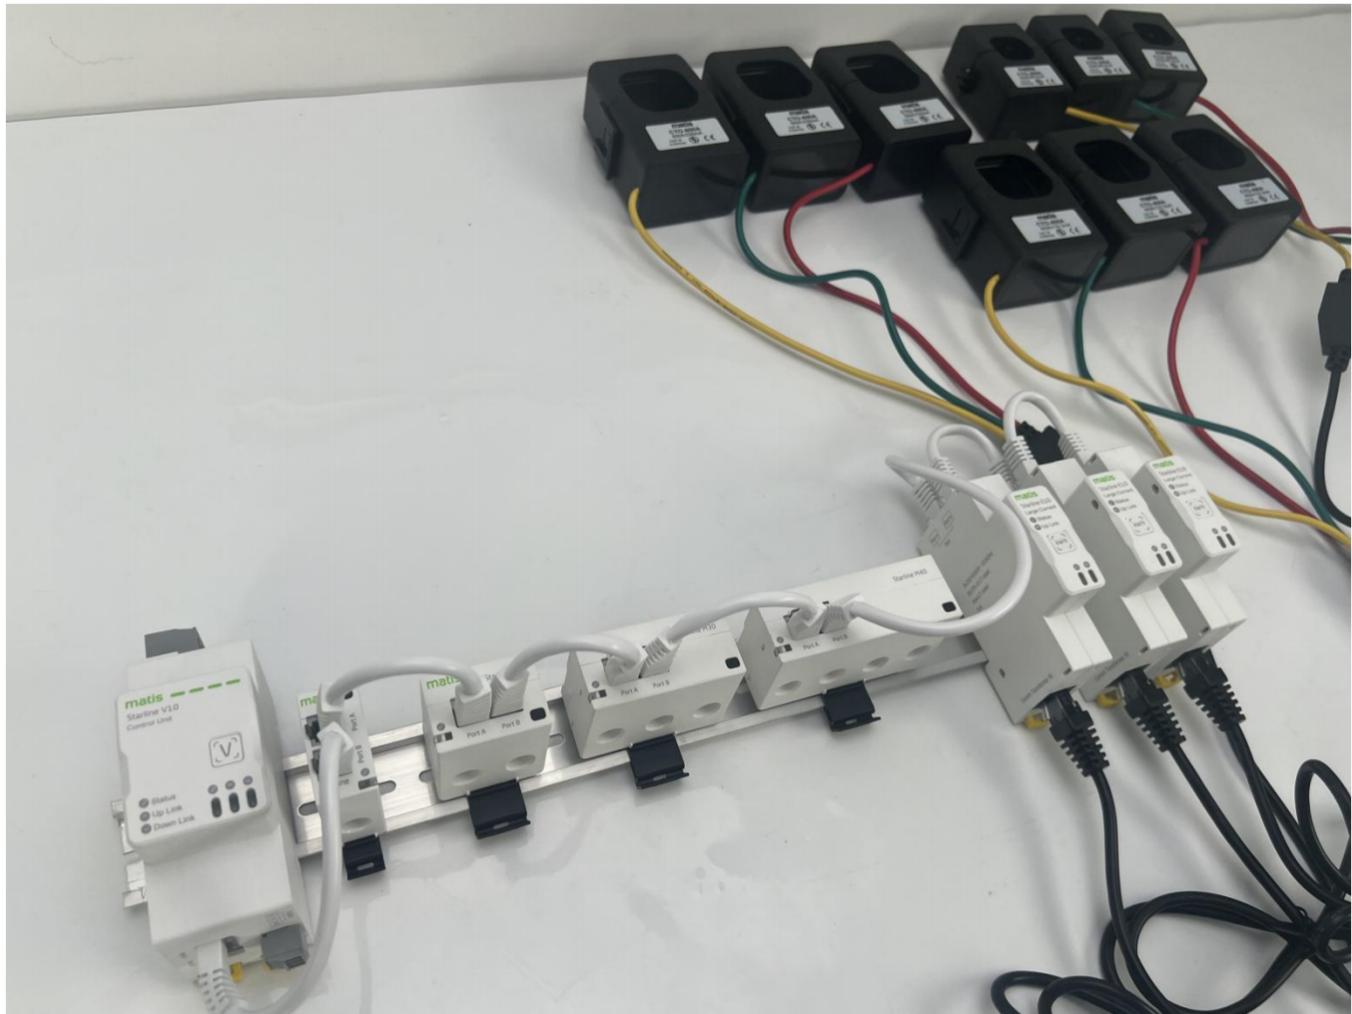


Fig. 2



----- END OF REPORT -----



Certificate of Compliance

Certificate No. : XDAK223250958071411DC

Applicant : Shanghai Matis Electric Co.Ltd
: Room318-320, No.83,West Huanghu Road, Pudong, Shanghai, China 201306

Manufacturer : Shanghai Matis Electric Co.Ltd
: Room318-320, No.83,West Huanghu Road, Pudong, Shanghai, China 201306

Product Name : Multi Circuit Power Monitoring System

Trade Name : Matis

Main Test Model : Starline -V10Starline- M10/20/30/40+ Starline-E10/E11/E31+
: CTO100/CTO/200/CTO400/CTO600

Additional models : /

Test Standard : EN 62053-21:2003

As shown in the Test Report No. : XDAK223250958071411DR

The EUT described above has been tested by us with the listed standards and found in compliance with the council EMC directive 2014/30/EU. It is possible to use CE marking to demonstrate the compliance with this EMC Directive.
The certificate applies to the tested sample above mentioned only and shall not imply an assessment of the whole production.





Strictly
revise
forbid

Shanghai Matis Electric Co.Ltd

CE LVD TEST REPORT

Prepared For :	Shanghai Matis Electric Co.Ltd Room318-320, No.83,West Huanghu Road, Pudong, Shanghai, China 201306
Product Name:	Multi Circuit Power Monitoring System
Trade Name:	Matis
Main Test Model:	Starline -V10 + Starline- M10/20/30/40+ Starline-E10/E11/E31+ CTO100/CTO/200/CTO400/CTO600
Additional:	
Prepared By :	BST Testing (Shenzhen) Co.,Ltd. No.7, New Era Industrial Zone, Guantian, Bao'an District, Shenzhen, Guangdong, China
Test Date:	Jul.06, 2025 To Jul.09, 2025
Date of Report:	Jul.09, 2025
Report No.:	XDAK223250958071412AR

8ReJq8

ki8dAw

**TEST REPORT
EN 61010-1****Safety requirements for electrical equipment for measurement, control, and laboratory use - Part 1: General requirements****Testing Laboratory**

Name..... : BST Testing (Shenzhen) Co.,Ltd.
Address..... : No.7,New Era Industrial Zone, Guantian, Bao'an District, Shenzhen, Guangdong, China
Testing location..... : BST Testing (Shenzhen) Co.,Ltd.

Applicant

name..... : Shanghai Matis Electric Co.Ltd
Address..... : Room318-320, No.83,West Huanghu Road, Pudong, Shanghai, China 201306

Test specification:

Standard..... : EN 61010-1:2010+A1:2019
Test procedure..... : Compliance with IEC 61010-1-2017COR.2:2013
Non-standard test method..... : N/A

Test item

Description..... : See page 1
Model and/or type reference..... : See page 1
Manufacturer : Shanghai Matis Electric Co.Ltd
Address : Room318-320, No.83,West Huanghu Road, Pudong, Shanghai, China 201306

Test item particulars

Classification of installation and use: Class I
Supply Connection..... : 220V

Possible test case verdicts

- test case does not apply to the test object : N(.A)
- test object does meet the requirement : P(Pass)
- test object does not meet the requirement : F(Fail)

**Summary of testing:****Testing location:****Tests performed (name of test and test clause):**

- EN 61010-1: 2010 +A1: 2019

Copy of marking plate:

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.



Multi Circuit Power Monitoring System

Model: Starline -V10

Input:AC230V 50HZ±10% ≤20mA



Shanghai Matis Electric Co.Ltd

Room318-320, No.83, West Huanghu Road, Pudong, Shanghai,
China 201306

Remarks:

1. Height of CE mark is 5mm or more, height of WEEE symbol is 7mm or more, height of other marks is 5mm or more, height of letters and numerals is 2mm or more.



BST Testing (Shenzhen) Co.,Ltd.

Report No.: XDAK223250958071412AR

Prepared by :

Adam Chen

Engineer

Reviewer :

Jacky Zhang

Supervisor

Approved & Authorized
Signer :



Manager

**TEST ITEM PARTICULARS:**

Type of item	: Measurement / Control / Laboratory
Description of equipment function.....	: A method for quantitative analysis of specific DNA sequences
Connection to MAINS supply.....	: Permanent / Detachable cord set / Non-detachable cord set / None / By adaptor
Overvoltage category.....	: II / III / IV
POLLUTION DEGREE.....	: IIIb
Means of protection.....	: Class III
Environmental conditions.....	: Normal / Extended (Specify):
For use in wet locations.....	: Yes / No
Equipment mobility.....	: Portable / Hand-held / Floor-standing / Fixed / Built-in
Operating conditions.....	: Continuous / Short time / Intermittent
Marked degree of protection to IEC 60529.....	: IPX0

Possible test case verdicts:

- test case does not apply to the test object.....	: N/A (or N)
- test object does meet the requirement.....	: P (Pass)
- test object does not meet the requirement.....	: F (Fail)

Testing.....

Date of receipt of test item.....	: July 9, 2025
Date(s) of performance of tests.....	: July 05, 2025 to July 09, 2025

General remarks:

The test results presented in this report relate only to the object tested.
This report shall not be reproduced, except in full, without the written approval of the issuing testing laboratory.
"(see Enclosure #)" refers to additional information appended to the report.
"(see appended table)" refers to a table appended to the report.

Throughout this report a comma / point is used as the decimal separator.

Manufacturer's Declaration per sub-clause 4.2.5 of IEC/CEC 02:

The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided.....

Yes
 Not applicable

General product information

1, The product is has PCB boards. With adaptor.



EN 61010-1

Clause	Requirement + Test	Result - Remark	Verdict
1	Scope and object		P
1.3	Verification	Type tests	P
1.4	Environmental conditions	See below	P
1.4.1	Normal environmental conditions		P
a)	indoor use		P
b)	altitude up to 2 000 m		P
c)	temperature 5 °C to 40°C		P
d)	maximum relative humidity		--
e)	mains supply voltage fluctuations	±10 % of the nominal voltage	P
f)	transient overvoltages	For adaptor	N
g)	temporary overvoltages occurring on the mains supply	For adaptor	N
h)	Applicable pollution degree of the intended environment	Pollution degree 2	--
1.4.2	Extended environmental conditions		N
a)	outdoor use		N
b)	altitude above 2 000 m		N
c)	temperature below 5 °C or above 40°C		N
d)	maximum relative humidity		--
e)	mains supply voltage fluctuations	Exceeding ±10 % of the nominal voltage	N
f)	Wet Location		N
g)	transient overvoltages		N

4	Tests		--
4.1	General	Type tests	P
4.2	Sequence of tests	inspected after each test	P
4.3	Reference test conditions	15-20°C, 75-106kPa	P
4.4	Testing in SINGLE FAULT CONDITION	(see Form A.1)	P
4.4.1	General		P
4.4.2	Application of fault conditions		--
4.4.2.1	Fault conditions shall include those specified in 4.4.2.2 to 4.4.2.14	(see Form A.1)	--
	After each application of a fault condition, the equipment or part shall pass the applicable tests of 4.4.4.	See below	P



EN 61010-1

Clause	Requirement + Test	Result - Remark	Verdict
4.4.2.2	Protective impedance		N
4.4.2.3	Protective conductor	(see Form A.1 & Form A.6)	P
4.4.2.4	Equipment or parts for short-term or intermittent operations	Continuous operation	N
4.4.2.5	Motors		P
	– stopped while fully energized	See appened table	P
	– prevented from starting	See appened table	P
	– one phase interrupted (multi-phase)		N
4.4.2.6	Capacitors		N
4.4.2.7	Mains transformers		P
4.4.2.7.1	Short circuit	(See Form A.1)	P
4.4.2.7.2	Overload	(See Form A.1)	P
4.4.2.8	Outputs	No hazards	P
4.4.2.9	Equipment for more than one supply		N
4.4.2.10	Cooling		P
a)	air-holes with filters shall be closed;	See appended table	P
b)	forced cooling by motor-driven fans shall be stopped		N
c)	cooling by circulation of water or other coolant shall be stopped		N
d)	loss of cooling liquid shall be simulated		N
4.4.2.11	Heating devices	No such heating devices	N
a)	Overridden timers for limit the heating period		N
b)	Overridden temperature controllers		N
4.4.2.12	Insulation between circuits and parts		P
4.4.2.13	Interlocks	No such interlocks	N
4.4.2.14	Voltage selectors		N
4.4.3	Duration of tests		--
4.4.3.1	The equipment shall be operated until further change as a result of the applied fault is unlikely	Comply with requirement	P
4.4.3.2	A device interrupted or limited the current shall limit the temperature of parts easily touched		N
4.4.3.3	Fuse opened and not operate within approximately 1 s, and the current through the fuse shall be measured		N
4.4.4	Conformity after application of fault conditions		--

**EN 61010-1**

Clause	Requirement + Test	Result - Remark	Verdict
4.4.4.1	Protection against electric shock is checked after the application of single fault as follows: a), no accessible conductive parts become hazardous live b), performing a voltage test on double insulation or reinforced insulation c), measuring the temperature of transformer winding	Not become hazardous live parts See clause 6.8	P P
4.4.4.2	Temperature of outer surface of enclosure and of parts that can be touched is checked	See appended table	P
4.4.4.3	Protection against the spread of fire is checked	See appended table	P
4.4.4.4	Protection against other hazard is checked	See clause 7 and 8 and 11 to 16	P

5	MARKING AND DOCUMENTATION		--
5.1	Marking		--
5.1.1	General Required equipment markings are: visible: From the exterior; or After removing a cover; or Opening a door After removal from a rack or panel	See below See page 3 See page 3 No removing cover No opening door N	P P P N N N
	Not put on parts which can be removed by an OPERATOR Letter symbols (IEC 60027) used Graphic symbols (IEC 61010-1: Table 1) used Graphic symbols shall be explained in the documentation	No such parts	N
5.1.2	Identification a) Manufacturer's or supplier's name or trademark b) Model number, name or other means Manufacturing location identified	See label See label Only one manufacturing location.	P P N
5.1.3	Mains supply Equipment is marked as follows: a) Nature of supply:	See below	-- P --



EN 61010-1

Clause	Requirement + Test	Result - Remark	Verdict
	1) a.c. RATED mains frequency or range of frequencies		P
	2) d.c. with symbol 1		N
b)	RATED supply voltage(s) or range.....: AC220V		P
c)	Max. RATED power (W or VA)or input current.....: 5W		P
	The measured value not more than 110 % (see appended table)		P
	If more than one voltage range:		N
	Separate values marked; or		N
	Values differ by less than 20 %		P
d)	OPERATOR-set for different RATED supply voltages:		N
	Indicates the equipment set voltage		N
	PORTABLE EQUIPMENT indication is visible from the exterior		N
	Changing the setting changes the indication		N
e)	Accessory mains socket-outlets accepting standard mains plugs are marked:	No such accessory	N
	With the voltage if it is different from the mains supply voltage.....:		N
	For use only with specific equipment		N
	If not marked for specific equipment it is marked with:		N
	The maximum rated current or power; or		N
	Symbol 14 with full details in the documentation		N
5.1.4	Fuses		--
	OPERATOR replaceable fuse marking (see also 5.4.5).....:		N
5.1.5	Terminals, connections and operating devices	Comply with the standard	N
5.1.5.1	General		--
	Where necessary for safety, indication of purpose of terminals, connectors, controls and indicators marked	Comply with the standard	P
	If insufficient space, symbol 14 used		P
5.1.5.2	Terminals	See below	P
	Mains supply terminals identified		N
	Other terminal marking: + -		P
a)	functional earth terminals (symbol 5 used)		N
b)	protective conductor terminals:		--



EN 61010-1

Clause	Requirement + Test	Result - Remark	Verdict
	Symbol 6 is placed close to or on the terminal; or		N
	Part of appliance inlet		N
c)	Terminals of control circuits which are permitted by 6.6.3 to be connected to accessible conductive parts, with symbol 7 of table 1 unless connection is self-evident;		N
d)	Hazardous live terminals supplied from the interior	Comply with the standard	N
	Symbol 14 used; or		N
	RATINGS marked		N
	Standard mains socket outlet; or		N
5.1.6	Switches and circuit breakers		N
	If disconnecting device, on or off position marked		N
	Symbols 9 and 10 of Table 1		N
	A lamp alone is not considered to be a satisfactory marking		N
	For a push-button switch		N
5.1.7	Equipment protected by double insulation or reinforced insulation		N
	Protected throughout (symbol 11 used)		N
	Only partially protected (symbol 11 not used)		N
5.1.8	Field-wiring terminal boxes		N
	If terminal or enclosure exceeds 60 °C:		N
	Cable temperature rating marked		N
	Marking visible or beside terminal		N
5.2	Warning markings		--
	Visible when ready for normal use		P
	Are near or on applicable parts		P
a)	Symbols shall be at least 2.75 mm high. Text shall be at least 1.5 mm high and contrast in colour with the background		P
b)	Symbols or text moulded, stamped or engraved in a material shall be at least 2.0 mm high. If not contrasting in colour, they shall have a depth or raised height of at least 0.5 mm		P
	If necessary marked with symbol 14		P
	Statement to isolate or disconnect		P
5.3	Durability of markings	See appended table	P



EN 61010-1

Clause	Requirement + Test	Result - Remark	Verdict
	The required markings remain clear and legible in normal use		P
5.4	Documentation		--
5.4.1	General		P
	Equipment is accompanied by documentation which includes:		P
a)	Intended use	See usermanual	P
b)	Technical specification	See usermanual	P
c)	name and address of the manufacturer or supplier from whom technical assistance	See user manual	P
d)	Information specified in 5.4.2 to 5.4.5	See usermanual	P
e)	information about how to mitigate RISKS	See usermanual	P
f)	indicate that only accessories which meet the manufacturer's specifications shall be used	See usermanual	P
g)	provide guidance on how to determine that the equipment is functioning correctly	See user manual	P
h)	instructions for lifting and carrying	See user manual	P
	Warning statements and a clear explanation of warning symbols	See user manual	P
	include a statement that it must be consulted in all cases where symbol 14 of Table 1 is marked	See user manual	P
	Documentation may be provided on printed or electronic media		P
5.4.2	Equipment ratings		--
	Documentation includes:		P
a)	Supply voltage or voltage range	See page 3	P
	Frequency or frequency range		N
	Power or current rating	Ditto	P
b)	Description of all input and output connections	See usermanual	P
c)	Rating of insulation of external circuits		P
d)	Statement of the range of environmental conditions		P
e)	Degree of protection (IEC 60529)	IP20	N
5.4.3	Equipment installation	See usermanual	P
	Documentation includes instructions for:		--
a)	Assembly, location and mounting	See usermanual	P
b)	Protective earthing		N
c)	Connections to supply	See usermanual	P



EN 61010-1

Clause	Requirement + Test	Result - Remark	Verdict
d)	Permanently connected equipment:		P
	1) Supply wiring requirements		P
	2) If external switch or circuit-breaker, requirements and location recommendation		P
e)	Ventilation requirements	See usermanual	P
f)	Special services (e. g. air, cooling liquid)		N
g)	Maximum sound power level		N
h)	Instructions about sound pressure		N
5.4.4	Equipment operation		--
	Instructions for use include:		P
a)	Identification of operating controls and modes		P
b)	Positioning for disconnection		P
c)	Interconnection		P
d)	Specification of intermittent operation limits		N
e)	Explanation of symbols used		P
f)	Replacement of consumable materials		N
g)	Cleaning and decontamination		P
h)	Listing of any poisonous or injurious gases and quantities		N
i)	Risk-reduction procedures relating to flammable liquids		N
j)	methods of reducing the RISKS of burns from surfaces permitted to exceed the temperature limits of 10.1		P
	A statement about protection impairment if used in a manner not specified by the manufacturer		P
5.4.5	Equipment maintenance and service		--
	Instructions include:		P
	Sufficient preventive maintenance and inspection information		P
	Replacement of supply cords		N
	Specific battery type		--
	Any manufacturer specified parts		P
	Rating and characteristics of fuses	See following table	P
	Provided for service personnel:		--
	a) product-specific risks that may affect the service personnel		P

**EN 61010-1**

Clause	Requirement + Test	Result - Remark	Verdict
	b) protective measures for these risks		P
	c) verification of the safe state of the equipment after repair		P
5.4.6	Integration into systems or effects resulting from special conditions		--
	Aspects resulting from integration into systems or effects resulting from special ambient or application conditions shall be described in the documentation		P

6	PROTECTION AGAINST ELECTRIC SHOCK	(see appended table)	--
6.1	General		P
6.1.1	Requirements		P
	Accessible parts not hazardous live in normal condition and single fault condition	Class III	P
	Conformity is checked by the determination of 6.2 and 6.3 followed by the tests of 6.4 to 6.11	See below	P
6.1.2	Exceptions		--
	it is not feasible for operating reasons to prevent the following parts being both accessible and hazardous live		N
	a) parts of lamps and lamp sockets after lamp removal		N
	b) parts intended to be replaced by an OPERATOR		N
	hazardous live during the replacement or other operator action, but only if they are accessible only by means of a tool and have a warning marking		N
	Capacitance test	(see appended tables)	N
	Parts not hazardous live 10 s after interruption of supply		N
6.2	Determination of accessible parts		P
6.2.1	General	(see appended table A.6)	P
6.2.2	Examination	10N with test finger	P
6.2.2	Openings above parts that are hazardous live		P
6.2.3	Openings for pre-set controls	No such controls	N
6.3	Limit values for accessible parts		--
6.3.1	Levels in normal condition	(see appended table)	N
6.3.2	Levels in single fault condition	(see appended table)	N
6.4	Primary means of protection		P
6.4.1	General		P



EN 61010-1

Clause	Requirement + Test	Result - Remark	Verdict
	Accessible parts shall be prevented from becoming hazardous live by following:		P
6.4.2	Enclosures and protective barriers		P
	- meet the rigidity requirements of 8.1		P
	- for provide protection by basic insulation		N
	- provide protection by limiting access, clearances and creepage distances between accessible parts and hazardous live parts shall meet the requirements of 6.7		P
6.4.3	Basic insulation		P
	meet the requirements of 6.7		P
6.4.4	Impedance		N
	impedance used as a primary means of protection		--
	- a) limit the current or voltage to not more than the applicable level of 6.3.2		N
	- b) be rated for the maximum working voltage and for the amount of power that it will dissipate		N
	- c) meet the requirements of 6.7		N
6.5	Additional means of protection in case of single fault conditions		P
6.5.1	General		--
6.5.2	Protective bonding		N
6.5.2.1	General		--
	Accessible conductive parts:		--
	Bonded to the protective conductor terminal; or		N
	Separated by screen or barrier bonded to protective conductor terminal from parts which are hazardous live		N
6.5.2.2	Integrity of protective bonding		N
a)	Protective bonding consists of directly connected structural parts or discrete conductors or both; and withstands thermal and dynamic stresses		N
b)	Soldered connections:		N
	Independently secured		N
	Not used for other purposes		N
c)	Screw connections are secured		N
d)	Protective bonding not interrupted		N
e)	Any moveable connection specifically designed, and meets 6.5.2.4		N



EN 61010-1

Clause	Requirement + Test	Result - Remark	Verdict
f)	No external metal braid of cables used		N
g)	If mains supply passes through:		--
	Means provided for passing protective conductor;		N
	Impedance meets 6.5.1.3.		N
h)	Protective conductors bare or insulated, if insulated, green/yellow		N
	Exceptions:		--
	1) earthing braids;		N
	2) internal protective conductors etc.;		N
	Green/yellow not used for other purposes		N
	terminal suitable, and meets 6.5.2.3		N
6.5.2.3	Protective conductor terminal		N
a)	Contact surfaces are metal		N
b)	Appliance inlet used		N
c)	For rewireable cords and permanently connected equipment, protective conductor terminal is close to mains supply terminals		N
d)	If no mains supply is required, any protective conductor terminal:		--
	Is near terminals of circuit for which protective earthing is necessary		N
	External if other terminals external		N
e)	Equivalent current-carrying capacity to mains supply terminals	(see appended table)	N
f)	If plug-in, makes first and breaks last		N
g)	If also used for other bonding purposes, protective conductor:		--
	Applied first;		N
	Secured independently;		N
	Unlikely to be removed by servicing; or		N
	Warning marking requires replacement of protective conductor		N
h)	Protective conductor of measuring circuit:		--
	1) Current rating;		N
	2) protective bonding:		N
	Not interrupted; or		N
	Indirect bonding used (see 6.5.1.5)		N



EN 61010-1

Clause	Requirement + Test	Result - Remark	Verdict
i)	Functional earth terminals allow independent connection		N
j)	If a binding screw:		--
	Suitable size for bond wire		N
	Not smaller than M 4 (No. 6)		N
	At least 3 turns of screw engaged		N
k)	Contact pressure not capable of reduction by deformation of materials		N
	Passes tightening torque test	(see appended table)	N
6.5.2.4	Impedance of protective bonding of plug-connected equipment	(see appended table)	N
6.5.2.5	Impedance of protective bonding of permanently connected equipment	(see appended table)	N
6.5.2.6	Transformer protective bonding screen	(see appended table)	N
6.5.3	double insulation and reinforced insulation (see 6.7)	See 6.7	P
6.5.4	Protective impedance	(see appended table)	--
a)	single component used, that safety and reliability for protection against electric shock is assured		N
	- rated for twice the maximum working voltage		N
	- if a resistor, rated for twice the power dissipation for the maximum working voltage		N
b)	A combination of components used	No use such component	N
	Components, wires and connections are rated as required sw		N
6.5.5	Automatic disconnection of the supply		--
	If used, it meets :		P
a)	be rated to disconnect the load within the time specified in figure 2		P
b)	be rated for the maximum rated load conditions of the equipment		P
6.5.6	Current- or voltage-limiting device		--
	If used, it meets :		N
a)	be rated to limit the current or voltage to the levels not exceeding the values of 6.3.2		N
b)	shall be rated for the maximum working voltage and, if applicable, for the maximum operational current		N

**EN 61010-1**

Clause	Requirement + Test	Result - Remark	Verdict
c)	clearance and creepage distance between the terminations of the current or voltage limiting device meet requirements of 6.7 for supplementary insulation		N
6.6	Connections to external circuits		--
6.6.1	General		--
	Connections do not cause accessible parts of the following to become hazardous live in normal condition or single fault condition:		N
	Separation of circuits provided; or		N
	Short circuit of separation does not cause a Hazard		N
	Instructions or markings include:		P
	a) rated conditions for terminal		N
	b) Required rating of external circuit insulation		N
6.6.2	terminals for external circuits		--
	terminals which receive a charge from an internal capacitor are not hazardous live	(see appended table)	N
6.6.3	Circuits with terminals which are hazardous live		--
	These circuits are:		--
	Not connected to accessible conductive parts; or		N
	Connected to accessible conductive parts, but are not mains circuits and have one terminal contact at earth potential		N
	No accessible conductive parts are hazardous live		N
6.6.4	Accessible terminals for stranded conductors		N
	No risk of accidental contact because:		--
	Located or shielded		N
	Self-evident or marked whether connected to accessible conductive parts		N
	Accessible terminals will not work loose		N
6.7	Insulation requirements		--
6.7.1	The nature of insulation		--
6.7.1.1	General		--
	requirements for insulation depend on:		--
	- the required level of insulation	Basic insulation	P
	- the maximum TRANSIENT OVERVOLTAGE		N
	- the maximum WORKING VOLTAGE	15VDC	P



EN 61010-1

Clause	Requirement + Test	Result - Remark	Verdict
	- the POLLUTION DEGREE of the micro-environment	POLLUTION DEGREE 3	P
	- the maximum TEMPORARY OVERVOLTAGE		N
6.7.1.2	Clearances		--
	Multiplication factor	1 (rated operating altitude $\leq 2000\text{m}$)	P
6.7.1.3	Creepage distances		--
	Material group IIb	$100 \leq \text{CTI} < 175$	P
6.7.1.4	Solid insulation		--
6.7.1.5	Requirements for insulation according to type of circuit	see 6.7.2, 6.7.3, K1, K2, K3	--
6.7.2	Insulation for MAINS CIRCUITS of OVERVOLTAGE CATEGORY II with a nominal supply voltage up to 300 V		N
6.7.2.1	CLEARANCES and CREEPAGE DISTANCES	(See appended table)	P
6.7.2.2	Solid insulation	See below	P
6.7.2.2.1	General		--
6.7.2.2.2	Moulded and potted parts	enclosure	P
6.7.2.2.3	Inner insulating layers of printed wiring boards		N
	For REINFORCED INSULATION (RI):		--
	a) the thickness of the insulation is at least 0,4 mm		N
	b) two separate layers, each of which is BASIC INSULATION (BI);		N
	c) two separate, and the combination of layers is REINFORCED INSULATION (RI)		N
6.7.2.2.4	Thin-film insulation		N
	a) the thickness of the insulation is at least 0,4 mm		N
	b) two separate layers, each of which is BASIC INSULATION (BI);		N
	c) two separate, and the combination of layers is REINFORCED INSULATION (RI)		N
6.7.3	Insulation for secondary circuits derived from MAINS CIRCUITS of OVERVOLTAGE CATEGORY II up to 300 V		--
6.7.3.1	General		--
6.7.3.2	Clearances		P
6.7.3.3	Creepage distances		P
6.7.3.4	Solid insulation		P
6.7.3.4.1	General		P



EN 61010-1

Clause	Requirement + Test	Result - Remark	Verdict
6.7.3.4.2	Moulded and potted parts		P
6.7.3.4.3	Inner insulating layers of printed wiring boards		P
6.7.3.4.4	Thin-film insulation		N
6.8	Procedure for voltage tests	(See appended table)	P
6.8.1	General		--
6.8.2	Humidity preconditioning	40°C, 94%RH, 48h	--
6.8.3	Test procedures	(See appended table)	--
6.8.3.1	The a.c. voltage test		P
6.8.3.2	The 1 min d.c. voltage test		--
6.8.3.3	The impulse voltage withstand test		--
6.9	Constructional requirements for protection against electric shock		--
6.9.1	General		--
	If a failure could cause a hazard:		N
a)	Security of wiring connections		P
b)	Screws securing removable covers	No such covers	N
c)	Accidental loosening		P
6.9.2	Insulating materials		P
a)	Easily damaged materials not used		P
b)	Non-impregnated hydroscopic materials not used		P
6.9.3	Colour coding		P
	Green-and-yellow insulation shall not be used except for:		--
a)	protective earth conductors;		N
b)	PROTECTIVE BONDING conductors;		N
	c) potential equalization conductors for safety purposes;		N
	d) functional earth conductors.		N
6.10	Connection to mains supply source and connections between parts of equipment		--
6.10.1	Mains supply cords		--
	rated for maximum equipment current (see 5.1.3c)		N
	Cable complies with IEC 60227 or IEC 60245		N
	Heat-resistant if likely to contact hot parts		N
	Temperature rating (cord and inlet)		N
	Green/yellow used only for connection to protective conductor terminals		N



EN 61010-1

Clause	Requirement + Test	Result - Remark	Verdict
	Detachable cords with IEC 60320 mains connectors:		--
	Conform to IEC 60799; or		N
	Have the current rating of the mains connector		N
6.10.2	Fitting of non-detachable mains supply cords		N
6.10.2.1	Cord entry		N
	protected against abrasion and sharp bends at the point where the cord enters the equipment		--
a)	an inlet or bushing with a smoothly rounded opening		N
b)	a reliably fixed flexible cord guard made of insulating material protruding		N
	Non-detachable cord protection:		N
6.10.2.2	Cord anchorages:		N
a)	Cord is not clamped by direct pressure from a screw		N
b)	Knots are not used		N
c)	Cannot push the cord into the equipment to cause a hazard		N
d)	No failure of cord insulation in anchorage with metal parts		N
e)	not loosen the cord anchorage without the use of a TOOL		N
f)	be designed so that cord replacement does not cause a HAZARD, and it shall be clear how the relief from strain is provided		N
	compression bushing:		N
	1) Clamps all types and sizes of mains cords; and		N
	2) Is suitable:		N
	For connection to terminals provided; or		N
	It is designed for screened mains cord		N
6.10.3	Plugs and connectors		--
	Mains supply plugs, connectors etc., conform with relevant specifications		P
	If equipment supplied at voltages below 6.3.2.a) or from a sole source:		P
	Plugs of supply cords do not fit mains sockets above rated supply voltage		N
	Mains-type plugs used only for connection to mains supply		N

**EN 61010-1**

Clause	Requirement + Test	Result - Remark	Verdict
	Plug pins which receive a charge from an internal capacitor		N
	Accessory mains socket outlets:		N
	a) Marking if accepts a standard mains plug (see 5.1.3e)		N
	b) Input has a protective earth conductor if outlet has earth terminal contact		N
6.11	Disconnection from supply source		--
6.11.1	General	See below	P
	Disconnects all current carrying conductors		P
6.11.2	Exceptions		--
a)	Equipment supplied by low energy source; or		P
b)	Equipment connected to impedance protected supply; or		N
c)	Equipment constitutes an impedance protected load		N
6.11.3	Requirements according to type of equipment		--
6.11.3.1	Permanently connected equipment and multi-phase equipment		N
	Employs switch or circuit-breaker		N
	If switch or circuit-breaker is not part of the equipment, documentation specifies:		N
a)	Switch or circuit-breaker to be included in building installation		N
b)	Location		N
c)	Marking		N
6.11.3.2	Single-phase cord-connected equipment		N
	Equipment is provided with:		--
a)	Switch or circuit-breaker; or		N
b)	Appliance coupler (disconnectable without tool); or		N
c)	Separable plug (without locking device)		N
6.11.4	Disconnecting devices		--
6.11.4.1	General		--
	Electrically close to the supply		N
	Power-consuming components shall not be electrically located between the supply source and the disconnecting device		N
6.11.4.2	Switches and circuit-breakers		N

**EN 61010-1**

Clause	Requirement + Test	Result - Remark	Verdict
	When used as disconnection device:		--
	Meets IEC 60947-1 and IEC 60947-3		N
	Marked to indicate function		N
	Not incorporated in mains cord		N
	Does not interrupt protective earth conductor		N
6.11.4.3	Appliance couplers and plugs		--
	Where an appliance coupler or separable plug is used as the disconnecting device		P
	Readily identifiable and easily reached by the operator		N
	Single-phase portable equipment cord length ≤ 3 m		N
	Protective earth conductor connected first and disconnected last		N

7	PROTECTION AGAINST MECHANICAL HAZARDS	--
7.1	General	See below
	Conformity is checked by 7.2 to 7.7	P
7.2	Sharp edges	--
	All easily-touched parts of the equipment shall be smooth and rounded	P
	easily-touched parts of the equipment shall not cause an injury in SINGLE FAULT CONDITION	P
7.3	Moving parts	N
7.3.1	General	--
7.3.2	Exceptions	--
a)	For obviously intended to operate on parts or materials external to the equipment, shall be designed to minimize inadvertent touching of these moving parts	N
b)	If operator access permitted:	--
	1) Access requires tool	N
	2) Statement about training	N
	3) Warning markings or symbol 14	N
7.3.3	RISK assessment for mechanical HAZARDS to body parts	--
	RISKS shall be reduced to a tolerable level by at least the applicable minimum protective measure of Table 12	N



EN 61010-1

Clause	Requirement + Test	Result - Remark	Verdict
7.3.4	Limitation of force and pressure		N
	The maximum tolerable continuous contact pressure is 50 N/cm ² , with a maximum force of 150 N.		N
	The maximum tolerable temporary force for body contact areas of at least 3 cm ² is 250 N for a maximum duration of 0,75 s		N
7.3.5	Gap limitations between moving parts		N
7.3.5.1	Gap limitations between moving parts – Access normally allowed		N
7.3.5.2	Gap limitations between moving parts – Access normally prevented		N
7.4	Stability		P
	For each castor and support foot:		--
	- RATED to support a load of at least 4 times its normal load		N
	- tested according to d) and e)		N
	Conformity tests:		--
a)	10° tilt test		P
b)	multi-directional force test		N
c)	downward force test		N
d)	castor or support foot that supports the greatest load (M) is loaded with 4 times that load (4M)		N
e)	The castor or support foot that supports the greatest load is removed from the equipment and the equipment is placed on a flat surface		N
7.5	Provisions for lifting and carrying		--
7.5.1	General		--
	Equipment or parts having a mass of 18 kg or more	No Handles or grips	N
7.5.2	Handles and grips		N
	Handles or grips withstand four times weight		N
7.5.3	Lifting devices and supporting parts		--
	four times the maximum load		N
7.6	Wall mounting		N
	Mounting brackets withstand four times weight		N
7.7	Expelled parts		--
	Equipment contains or limits the energy		P
	Protection not removable without the aid of a tool		P

**EN 61010-1**

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

8	Mechanical resistance to shock and impact		--
8.1	General		--
	After the tests of 8.2 to 8.3		P
	hazardous live parts not accessible		P
	Voltage tests of 6.8	(see appended table)	P
i)	no leaks of corrosive or harmful substances		P
ii)	enclosure shows no cracks (hazard)		P
iii)	clearances not less than their permitted values	(see appended table)	P
iv)	insulation of internal wiring remains undamaged		P
v)	barriers not damaged or loosened		P
vi)	No moving parts exposed, except permitted by 7.3		P
vii)	No damage which could cause spread of fire		P
8.2	Enclosure rigidity tests		--
8.2.1	Static test		--
	a force of 30 N applied by the hemispherical end of a hard rod of 12 mm diameter.	See 8.1	P
8.2.2	Impact test		--
	impact by a smooth steel sphere with a mass 500 g ± 25 g and with a diameter of approximately 50 mm	See 8.1	P
8.3	Drop test		--
8.3.1	Equipment other than hand-held equipment and direct plug-in equipment		P
8.3.2	Hand-held equipment and direct plug-in equipment		P

9	Protection against the spread of fire		P
9.1	General		--
	Conformity for each source of hazard or area of the equipment is checked by one of the following:	(See appended table)	--
a)	Fault test of 4.4; or	(See appended table)	P
b)	Application of 9.2 (eliminating or reducing the sources of ignition); or		P
c)	Application of 9.3 (containment of fire within the equipment)		P
9.2	Eliminating or reducing the sources of ignition within the equipment	See below	--



EN 61010-1

Clause	Requirement + Test	Result - Remark	Verdict
a)	1) Limited-energy circuit (see 9.4); or		P
	2) Insulation meets the requirements for basic insulation; or	(see appended table)	P
	Bridging the insulation does not cause ignition	(see appended table)	P
b)	Any ignition hazard related to flammable liquids (see 9.5)	No flammable liquid	N
c)	No ignition occurs when tested in single fault condition	(see appended table)	N
9.3	Containment of the fire within the equipment, should it occur		--
9.3.1	General		--
a)	Energizing of the equipment is controlled by an operator held switch		P
b)	Enclosure is conform with constructional requirements of 9.3.2; and		P
	Requirements of 9.5 are met		P
9.3.2	Constructional requirements		P
a)	Connectors and insulating material have flammability classification FV2 or better	(see appended table)	P
b)	Insulated wires and cables shall retard flame propagation. Meet: IEC 60332	(see appended table)	P
c)	The enclosure is constructed as follows :	The equipment has bottom openings	--
	1) Bottom and sides constructed with:		P
i)	No openings; or		P
ii)	be made of metal with perforations as specified in Table 16; or		P
iii)	Metal screen with a mesh		N
iv)	openings with baffles according to Figure 12		P
	2) Material of enclosure and any baffle or flame barrier is made of:		--
	Metal (except magnesium); or		P
	Non metallic materials have flammability classification FV1 or better		N
	3) enclosure and any baffle or flame barrier have adequate rigidity		P
9.4	Limited-energy circuit		--
a)	Potential not more than 30 r.m.s. and 42.4 V peak, or 60 V dc		N
b)	Current limited by one of following means:		N

**EN 61010-1**

Clause	Requirement + Test	Result - Remark	Verdict
	1) Inherently or by impedance; or		N
	2) Overcurrent protective device; or		N
	3) A regulating network limits also in single fault condition		N
c)	Is separated by at least basic insulation		N
	If overcurrent protective device used:		N
	Fuse or a non adjustable electromechanical device		N
9.5	Requirements for equipment containing or using flammable liquids	No such liquids.	N
	Flammable liquids contained in or specified for use with equipment do not cause spread of fire		N
	Risk is reduced to a tolerable level :	(see appended table)	N
a)	The temperature of surface or parts in contact with flammable liquids is 25 °C below fire point		N
b)	The quantity of liquid is limited		N
c)	Flames are contained within the equipment		N
	Detailed instructions for risk-reduction provided		N
9.6	Overcurrent protection		--
9.6.1	General		--
	Devices not in the protective conductor		P
	Fuses or single-pole circuit-breakers not fitted in neutral (multi-phase)		N
9.6.2	permanently connected equipment	Not such equipment	N
	Overcurrent device:		N
	Fitted within the equipment; or		N
	Specified in manufacturer's instructions		N
9.6.3	Other equipment		--
	Protection within the equipment		P

10	Equipment temperature limits and resistance to heat	-
10.1	Surface temperature limits for protection against burns	P
	Easily touched surfaces within the limits	(see appended table)
	Heated surfaces necessary for functional reasons exceeding specified values:	N
	Are recognizable as such by appearance or function; or	P



EN 61010-1

Clause	Requirement + Test	Result - Remark	Verdict
	Are marked with symbol 13	No use this mark	N
	Guards are not removable without tool		P
10.2	Temperatures of windings	(see appended table)	N
	Limits not exceeded in:		N
	normal condition		N
	single fault condition		N
10.3	Other temperature measurements	(see appended table)	P
	Following measurements conducted if applicable:		--
a)	Value of 60 °C of field-wiring terminal box not exceeded		N
b)	Surface of flammable liquids and parts in contact with this liquids		N
c)	Surface of non-metallic enclosures		P
d)	Parts made of insulating material supporting parts connected to mains supply		P
e)	Terminals carrying a current more than 0.5 A		N
10.4	Conduct of temperature test	(see appended table)	P
10.4.1	General		--
10.4.2	Temperature measurement of heating equipment		N
10.4.3	Equipment intended for installation in a cabinet or a wall		N
10.5	Resistance to heat		P
10.5.1	Integrity of clearance and creepage distances	(See appended table)	P
10.5.2	Non-metallic enclosures	(See appended table)	P
	After treatment:		--
	No hazardous live parts accessible;		P
	Tests of 8.1 and 8.2	(See appended table)	P
	In case of doubt, tests of 6.8 (without humidity preconditioning)	(See appended table)	N
10.5.3	Insulating material		--
a)	Parts supporting parts connected to mains supply		P
b)	Terminals carrying a current more than 0.5 A		P
	Examination of material data; or		P
	in case of doubt:		N
	1) Ball pressure test; or	See appended table	P

**EN 61010-1**

Clause	Requirement + Test	Result - Remark	Verdict
	2) Vicat softening test of ISO 306		N

11	Protection against hazards from fluids		P
11.1	General		P
11.2	Cleaning	(See appended table)	P
11.3	Spillage	(See appended table)	N
11.4	Overflow	(See appended table)	N
11.5	Battery electrolyte		--
	Battery electrolyte leakage presents no hazard		--
11.6	Specially protected equipment		N
11.7	Fluid pressure and leakage		--
11.7.1	Maximum pressure		N
	Maximum pressure of any part does not exceed Prated		N
11.7.2	Leakage and rupture at high pressure	(See appended table)	N
	Test to IEC 60335 (refrigeration only)		N
11.7.3	Leakage from low-pressure parts	(See appended table)	N
11.7.4	Overpressure safety device		--
	Does not operate in normal use		N
	Meets ISO 4126-1; and		N
	It is conform with:		N
a)	Connected as close as possible to parts intended to be protected		N
b)	Easy access for inspection, maintenance and repair		N
c)	Adjustment only with tool		N
d)	No discharge towards person		N
e)	No hazard from deposit of discharged material		N
f)	Adequate discharge capacity		N
	No shut-off valve between overpressure safety device and protected parts		N

12	Protection against radiation, including laser sources, and against sonic and ultrasonic pressure	--
12.1	General	N
	Equipment provides protection	N



EN 61010-1

Clause	Requirement + Test	Result - Remark	Verdict
12.2	Equipment producing ionizing radiation		N
12.2.1	Ionizing radiation	No ionizing radiation	N
	a) Meet the requirements of 12.2.1.2. or be tested, classified, and marked according to IEC 60405	(See appended table)	N
	b) uses or generates radiation but only emits stray radiation, it shall meet the requirements of 12.2.1.3		N
12.2.1.2	Equipment intended to emit radiation		N
	Equipment which contains radioactive substances or that generates x-rays		N
	If the effective dose rate at any easily reached point 50 mm from the outer surface exceeds 5 $\mu\text{Sv}/\text{h}$:		N
	a) with symbol 17 of Table 1;		N
	b) for equipment containing one or more radioactive substances, with the abbreviations of the radionuclides		N
	c) either with the maximum dose rate value at 1 m, or with a dose rate value between 1 $\mu\text{Sv}/\text{h}$ and 5 $\mu\text{Sv}/\text{h}$ at the appropriate distance in m		N
	Measuring maximum radiation		N
	Equipment containing X-ray sources is set to produce the maximum possible level of radiation		N
12.2.1.3	Equipment not intended to emit radiation		N
	The effective dose rate of unintended stray radiation at any easily reached point 100 mm shall not exceed 1 $\mu\text{Sv}/\text{h}$		N
12.2.2	Accelerated electrons		N
	which electrons are accelerated by voltages exceeding 5 kV cannot be opened without the use of a tool		N
12.3	Ultra-violet (UV) radiation	(Conformity test under consideration)	N
	No unintentional and hazardous escape of UV radiation		N
12.4	Micro-wave radiation		N
	Power density does not exceed 10 W/m^2 :		
12.5	Sonic and ultrasonic pressure		N
12.5.1	Sound level	(See appended table)	N
12.5.2	Ultrasonic pressure	(See appended table)	N

**EN 61010-1**

Clause	Requirement + Test	Result - Remark	Verdict
12.6	Laser sources (IEC 60825-1)		N

13	Protection against liberated gases, explosion and implosion	--
13.1	Poisonous and injurious gases	Not such gases
	Attached data/test reports demonstrate conformity	N
13.2	Explosion and implosion	N
13.2.1	Components	N
	Components liable to explode:	N
	Pressure release device provided; or	N
	Apparatus incorporates operator protection (see also 7.6)	N
	Pressure release device:	N
	Discharge without danger	N
	Cannot be obstructed	N
13.2.2	Batteries and battery charging	No batteries used
	If explosion or fire hazard could occur:	N
	Protection incorporated in the equipment; or	N
	Instructions specify batteries with built-in protection	N
	In case of wrong type of battery used:	N
	No hazard; or	N
	Warning by marking and within instructions	N
	Equipment with means to charge rechargeable batteries:	N
	Warning against the charging of non-rechargeable batteries; and	N
	Type of rechargeable battery indicated; or	N
	Symbol 14 used	N
	Battery compartment design	(See appended table)
	Single component failure	N
	Polarity reversal test	N
13.2.3	Implosion of cathode ray tubes	No such tubes
	If maximum face dimensions > 160 mm:	N
	Intrinsically protected and correctly mounted; or	N
	enclosure provides protection:	N
	If non-intrinsically protected:	N

**EN 61010-1**

Clause	Requirement + Test	Result - Remark	Verdict
	Screen not removable without tool		N
	If glass screen, not in contact with surface of tube		N

14	Components and subassemblies		P
14.1	General	See below	P
	Where safety is involved, components meet relevant requirements	(see appended table)	P
14.2	Motors		N
14.2.1	Motor temperatures		--
	Does not present a hazard when stopped or prevented from starting; or		N
	Protected by overtemperature or thermal protection device conform with 14.3		N
14.2.2	Series excitation motors		N
	Connected direct to device, if overspeeding causes a hazard		N
14.3	Overtemperature protection devices		N
	Devices operating in a single fault condition		--
a)	Reliable function is ensured		N
b)	Rated to interrupt maximum current and voltage		N
c)	Does not operate in normal use		N
	For self-resetting overtemperature protection device		--
	1) self-resetting overtemperature protection devices are caused to operate 200 times;		N
	2) non-self-resetting overtemperature protection devices, except thermal fuses, are reset after each operation and thus caused to operate 10 times;		N
	3) non-resetting overtemperature protection devices are caused to operate once.		N
14.4	Fuse holders		--
	No access to hazardous live parts		N
14.5	Mains voltage selecting devices		N
	constructed so that a change from one voltage or one type of supply to another cannot occur accidentally		N
	5.1.3 d) for marking requirements		N
14.6	Mains transformers tested outside equipment		N

**EN 61010-1**

Clause	Requirement + Test	Result - Remark	Verdict
	short-circuit and overload tests in 4.4.2.7	(see Forms A.1)	P
14.7	Printed circuit boards	See appended table	P
	Data shows conformity with FV-1 of IEC 60707 or better; or	V-0	P
	Test shows conformity with FV-1 of IEC 60707 or better; or	See appended table	N
	Thin film flexible PCB with limited-energy circuit used		N
14.8	Circuits or components used as transient overvoltage limiting devices		P
	After test, no sign of overload or degradation		P

15	Protection by interlocks		N
15.1	General	Not interlocks	N
	Interlocks are designed to remove a hazard before operator exposed		N
15.2	Prevention of reactivation		N
15.3	Reliability		N
	Single fault unlikely to occur; or		N
	Cannot cause a hazard		N

16	Hazards resulting from application		--
16.1	reasonably foreseeable misuse		P
	No HAZARDS shall arise if adjustments, knobs, or other software-based or hardware-based controls are set in a way not intended, and not described in the instructions		P
	Other possible cases of REASONABLY FORESEEABLE MISUSE that are not addressed by specific requirements in this standard shall be addressed by RISK assessment (see Clause 17)		N
16.2	Ergonomic aspects		--
	For below which give rise to a HAZARD, a RISK assessment shall be documented:	No rise to hazard	--
	a) limitation of body dimensions;		N
	b) displays and indicators;		N
	c) accessibility and conventions of controls;		N
	d) Arrangements of TERMINALS.		N

**EN 61010-1**

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

17	RISK assessment		--
	equipment shows that HAZARDS not fully addressed in Clauses 6 to 16		N
	a) risk analysis		N
	b) risk evaluation		N
	c) risk reduction		N
	risks remaining after a risk assessment shall be identified in the instructions for the responsible body.		N
	adequate information about how to mitigate these risks shall be given		N
	1) eliminate or reduce RISKS as far as possible		N
	2) take the necessary protective measures in relation to RISKS that cannot be eliminated		N
	3) inform users of the residual RISKS due to any shortcomings of the protective measures adopted		N

**EN 61010-1**

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

ANNEX F	ROUTINE TESTS	--
	Manufacturer's declaration	P

ANNEX H	QUALIFICATION OF CONFORMAL COATINGS FOR PROTECTION AGAINST POLLUTION	--
H.1	General	N
	Conformal coatings meet the requirements of Clause H.2 and H.3.	N
H.2	Technical properties	N
	Technical properties of conformal coatings are suitable for the intended application. In particular:	—
	a) Manufacturer indicate that it is a coating for PWBs;	N
	b) RATED operating temperature include the temperature range of the indicated application;	N
	c) CTI, insulation resistance and dielectric strength are suitable for the intended application;	N
	d) Coating have adequate UV resistance, if it is exposed to sunlight;	N
	e) Flammability RATING of the coating is at least the required flammability RATING of the applied PWB.	N
H.3	Qualification of coatings	(see Form A.42)
	Coating complies with the conformity requirements.	N

ANNEX K	INSULATION REQUIREMENTS NOT COVERED BY CLAUSE 6.7	(see Forms A.15 and A.18)	N
----------------	--	---------------------------	---

**Appendix tables**

4.4	TABLE: Testing in single FAULT CONDITION – Results			Form A.1	P
	Ambient temperature (°C)			22.5 °C	--
	Ambient temperature (°C)			22.3 °C	--
	Test voltage			15VDC	--

Test subclause	Fault No.	Fault	Test time	Comments	Verdict
4.4.2.6	Adaptor output	s-c	5min	Unit shut down, no damage, no hazards. No function	P
4.4.2.6.1	Q1 (pin G-D)	s-c	5mins	Unit shut down, no damage, no hazards. No function	P
	U2 (pin 1-6)	s-c	5mins	Unit shut down, no damage, no hazards. No function	P
	C1	s-c	5mins	Unit shut down, no damage, no hazards. No function	P
	D2	s-c	5mins	Unit shut down, no damage, no hazards. No function	P

NOTE:

- 1, Record dielectric strength test on Form A.14 and temperature tests on Form A.20.
- 2, Record in the comments column for each test whether carried out during or after SINGLEFAULT CONDITION.
- 3, s-c=short circuit, o-c=open circuit, o-l=overload

5.1.3	TABLE: mains supply				P
	Marked rating.....	:	15VDC		--
	Phase.....	:	/		--
	Frequency	:	/		--
	Power	:	6A		--
Test No.	U (V) / F (Hz)	I (A)	I rated (A)	Condition /status	
1	15VDC	4.69A	6A	Normally working	
Remark: the measured value not exceed the marked value by more than 10%					

**Appendix tables**

5.3	TABLE: Durability of markings					Form A.4	P			
	Marking method (see NOTE)			Agent						
1)				A Water						
2)				B Isopropyl alcohol/ Petroleum spirit						
3)				C (specify agent)						
4)				D (specify agent)						
5)				E (specify agent)						
NOTE – Where applicable include print method, label material, ink or paint type, fixing method, adhesive and surface to which marking is fixed.										
	Marking location		Marking method (see above)							
Identification (5.1.2)			1), 2)							
Mains supply (5.1.3)			1), 2)							
Fuses (5.1.4)			1), 2)							
Terminals and operating devices (5.1.5.1)			1), 2)							
Measuring circuit terminals (5.1.5.2)			1), 2)							
Switches and circuit breakers (5.1.6)			1), 2)							
Double/reinforced equipment (5.1.7)			Not such equipment							
Field wiring Terminal boxes (5.1.8)			Not such equipment							
Warning marking (5.2)			1), 2)							
Battery charging (13.2.2)			No battery							
Method	Test agent	Remains legible Verdict	Label loose Verdict	Curled edges Verdict	Comments					
1), 2)	A, B	Remains legible	No loose	No curled	All markings accordance with 5.1.2 to 5.2 test in this method, and pass the test					

**Appendix tables**

6.2	TABLE: List of accessible parts			Form A.6	P				
6.1.2	Exceptions		See below		--				
6.2	Determination of accessible parts		See below		--				
Item	Description	Determination method (NOTE 5)		Exception under 6.1.2 (NOTE 4)					
1	Front Enclosure	Rigid test finger and Test pin 3 mm diameter		No hazard voltage					
NOTE 1 – Test fingers and pins are to be applied without force unless a force is specified (see 6.2.1) NOTE 2 – Special consideration should be given to inadequate insulation and high voltage parts (see 6.2) NOTE 3 – Parts are considered to be ACCESSIBLE if they could be touched in the absence of any covering which is not considered to provide suitable insulation (see note to paragraph 1 of 6.4). NOTE 4 – Capacitor test may be required (see Form A.7). NOTE 5 – The determination methods are: visual; rigid test finger; jointed test finger; pin 3 mm diameter; pin 4 mm diameter.									
Supplementary information: There are no any hazardous parts accessible after installation.									

6.3.1	TABLE: Levels in NORMAL CONDITION				N	
Open-circuit voltage measurement on secondary output terminal:						
Open-circuit voltage measured between:	Condition	max. Voltage		Comments		
		V peak	V d.c. / V a.c.			
--	--	--	--	--		
--		--	--	--		
Touch current measured between:	Condition	Accessible current (mA)	Accessible current limit(mA)	Charged capacitance (μ C/mJ)	Charged capacitance (μ C/mJ)	
--	--	--	--	--	--	
--		--	--	--	--	
Note: the Accessible current was measured according to 6.3.1 b) with the test circuit of figure A.1 connected between the specified points.						
Input: 110% of rated supply voltage						

**Appendix tables**

6.3.2	TABLE: Levels in SINGLE FAULT CONDITION			Form A.6	N	
Open-circuit voltage measurement on secondary output terminal (for model HT5156):						
Open-circuit voltage measured between:	Condition	max. Voltage		Comments		
		V peak	V d.c. / V.a.c.			
--	Single fault condition	--	--	Limit: --.		
--		--	--			
Touch current measured between:	Condition	Accessible current (mA)	Accessible current limit(mA)	Charged capacitance (μ C/mJ)	Charged capacitance (μ C/mJ)	
--	Single fault condition	--	--	--		
--		--	--	--		
Note: the Accessible current was measured according to 6.3.1 b) with the test circuit of figure A.1 connected between the specified points.						
Input: 110% of rated supply voltage						

6.5.2.1	TABLE: Cross-sectional area of bonding conductors			N
Conductor location		Cross-sectional area		Verdict
--		--		--

6.5.2.3	TABLE: Tightening torque test			N
Conductor location		Size of Screw	Tightening torque (Nm)	Verdict
--		--	--	--

6.5.2.4	TABLE: Impedance of of plug-connected equipment				N
ACCESSIBLE part under test		Test current A	Voltage attained after 1 min V	Calculated resistance (maximum allowed 0,1 Ω) Ω	Verdict
--		--	--	--	--
Supplementary information:					

6.5.2.5	TABLE: Impedance of protective bonding of permanently connected equipment				N
ACCESSIBLE part under test		Test current A	Voltage attained after 1 min (maximum 10 V) V		Verdict
--		--			
Supplementary information: Not permanently connectorequipment					

**Appendix tables**

6.5.2.6	TABLE: Transformer protective bonding screen			N
ACCESSIBLE part under test	Test current A	Voltage attained after 1 min (maximum 10 V) V		Verdict
Supplementary information: Not permanently connectorequipment				

6.5.3	TABLE: protective impedance			N
A high INTEGRITY single component				
Component	Location		Comments	
A combination of components				
Component	Location		Comments	
A combination of BASIC INSULATION and a current or voltage limiting device				
Component	Location		Comments	
Supplementary information:				

6.7.1	TABLE: protection against electric shock						N
clearance cl and creepage distance dcrat/of:	Up (V)	U r.m.s. (V)	required cl (mm)	cl (mm)	required dcr (mm)	dcr (mm)	

6.8	TABLE: Procedure for voltage tests (Dielectric strength tests)			P
4.4.4.1 b)	Conformity after application of fault conditions ¹			P
6.5.3	Supplementary insulation and reinforced insulation			P
6.6.1	Connections to external circuits			P
6.7.3.2	CLEARANCE			P
6.7.3.4	Solid insulation			P
6.10.2.2	Fitting of non-detachable MAINS SUPPLY cords ¹			N
8	Mechanical resistance to shock and impact			P
9.1 a) 2)	Eliminating or reducing the sources of ignition within the equipment			N
9.3 c)	Limited-energy circuit			N
11.2	Cleaning ¹			N
11.3	Spillage ¹			N

**Appendix tables**

11.4	Overflow ¹					N
11.6	Specially protected equipment ¹					N
¹ Record the fault, test or treatment applied before the dielectric strength test						
	Test site altitude.....			< 2000m		--
	Test voltage correction factor (see Table 10).....			1.0		--
Location or references from Forms A.2 and A.5	Clause or sub-clause	Humidity Yes/No	Working voltage V	Test voltage r.m.s./peak/d.c V	Comments	Verdict
+ - to enclosure	--	Yes	15V	500Vrms a.c.	No flashover or break down	P
Supplementary information:						

6.10.2.2	TABLE: Cord anchorage						N
Location		Mass kg	Pull N	Verdict	Torque Nm	Verdict	Comment
Supplementary information: Not fitting of non-detachable mains supply cords							

8	TABLE: mechanical resistance to shock and impact					P
Test part		Test condition			Test result	
Enclosure		Static test: 30N, hard rod of Φ12mm,			No hazard	
Enclosure		Impact test: 500g±25g, 50mm			No hazard	

9.3	TABLE: flammability of materials (IEC 60695-11-10)					N
	Material tested			Certificated materials		--
	Generic name					--
	Material manufacturer					--
	Type designation					--
	Colour					--
	Conditioning details					--
	Thickness (mm)			1 -		
				2 -		
				3 -		
	Duration of flaming after first application (s)			1 -		
				2 -		
				3 -		
	Duration of flaming plus glowing after second application (s)			1 -		
				2 -		
				3 -		

**Appendix tables**

	Specimen burns to holding clamp (Yes/No): 1 - 2 - 3 -	--
	Cotton ignited (Yes/No): 1 - 2 - 3 -	--

Supplementary information:

PCB and plastic enclosure have through UL authentication. And the flammability classification are V-0.

9.4	TABLE: Limited-energy circuit						N
circuit / location	Open circuit voltage (V)	Maximum current (A)	Maximum available power (VA)	Overload protection (VA)	Limited current (Yes/No)	Comments	
Supplementary information:							

10	TABLE: temperature tests						P
	Voltage (V)	AC220V				--	
	Frequency (Hz)					--	
	Duration (h, min)	4 h				--	
	Ambient temperature Ta (°C)	See below				--	
Part /location	Measured temperature Tm (°C)	Corrected maximum temperature(°C)	Maximum allowed temperature(°C)	Result	Comments		
connector	43	58.7	85	P	--		
Inside wire	38.1	53.8	105	P	--		
Enclosure	29.6	45.3	65	P	--		
Enclosure	29.3	45	65	P	--		
Ambient	24.3	40	--	--	--		
Supplementary information:							

10.5	TABLE: ball-pressure tests for thermoplastics			P
	Limited impression diameter (mm)	≤2 mm		--

**Appendix tables**

Part	Test temperature (°C)	Impression diameter (mm)
Enclosure	75°C	1.2
PCB	125°C	1.1

11	TABLE: protection against hazards from fluids							P
location	cleaning	spillage	overflow	equipment plus liquid	working voltage (V)	test voltage (V)	result	comments
Enclosure	/	/			AC220V	500V	Pass	

11.7.2	TABLE: leakage and rupture at high pressure						N
Part	Maximum permissible working pressure (pa)	Factor	Test pressure (pa)	Leakage test	Burst test	Comments	

11.7.3	TABLE: leakage from low-pressure parts				N
Part	Test pressure(Pa)	Result	Comments		

12.2.1	TABLE: ionizing radiation			N
location	radiation (Sv/h)	result	comments	

12.5.1	TABLE: sound level measurements			N
location	value (dBA)	calculated maximum sound pressure level		

12.5.2	TABLE: ultrasonic pressure measurements			N
location	value (dB)	frequency(kHz)	result	

13.2.2	TABLE: batteries tests			N
	Battery load and charging circuit diagram	No battery used		--
	Battery type			--

**Appendix tables**

	Battery manufacturer	:-	--
	Battery model	:-	--
	Battery catalogue No.	:-	--
	Battery ratings	:-	--
	Reverse polarity installation test		--
Component	Result, open circuit	Result, short circuit	

14.1	TABLE: components				P
Object/part No.	Manufacturer/ trademark	Type/ model	Technical data	Standard	Mark(s) of conformity ¹⁾
Enclosure	Various	Various	Thickness: Min. 1.2mm	--	--
Internal wire	Various	1015	26-18AWG, 105°C	UL758 UL61010-1	Tested with appliance & UL
connector	Various	DB9	ABS	UL61010-1	Tested with appliance

¹⁾ an asterisk indicates a mark which assures the agreed level of surveillance

14.2.1	TABLE: motor temperatures measurements					N
	Voltage (V).....	:-				--
	Frequency (Hz)	:-				--
	Duration (h, min).....	:-				--
	Ambient temperature Ta (°C).....	:-				--
Motor No. and location	Insulation class	Measured temperature Tm (°C)	corrected maximum temperature Tm- Ta+ 40 (°C)	maximum allowed temperature (°C)	result	

14.3	TABLE: overtemperature protection devices				N
	component	type	result	comments	

**Appendix tables**

Note: Type: self-resetting SR, non-self-resetting NSR, non-resetting NR			

14.6	TABLE: Short circuit (for Mains transformer)	Form A.39	N
	Mains transformers tested outside equipment	Approved Adaptor	--
4.4.2.7.2	Short circuit		--
	Type		--
	Manufacturer		--
	Test in equipment		N
	Test on bench		N
	Temperature protection class of the lowest RATED winding (class or maximum RATED temperature) .:		--
	Winding identification		--
	Type of protector for winding		--
	Elapsed time		--
	Winding temperature, primary (°C)		N
	Winding temperature, secondary (°C)		N
	Tissue paper / cheesecloth OK ?		N
	Voltage test, primary to secondary (V)		N
	Voltage test, primary to core (V)		--

**Appendix tables**

14.6	TABLE: Overload tests (for Mains transformer)	Form A.40	N
	Mains transformers tested outside equipment	Approved Adaptor	
	Type		--
	Manufacturer		--
	Test in equipment		N
	Test on bench		N
	Temperature protection class of the lowest RATED winding (class or maximum RATED temperature) .:		--
	Winding identification		--
	Type of protector for winding		--
	Elapsed time		--
	Winding temperature, primary (°C)		N
	Winding temperature, secondary (°C)		N
	Tissue paper / cheesecloth OK ?		N
	Voltage test, primary to secondary (V)		N
	Voltage test, primary to core (V)		--



Product Photos

Fig. 1


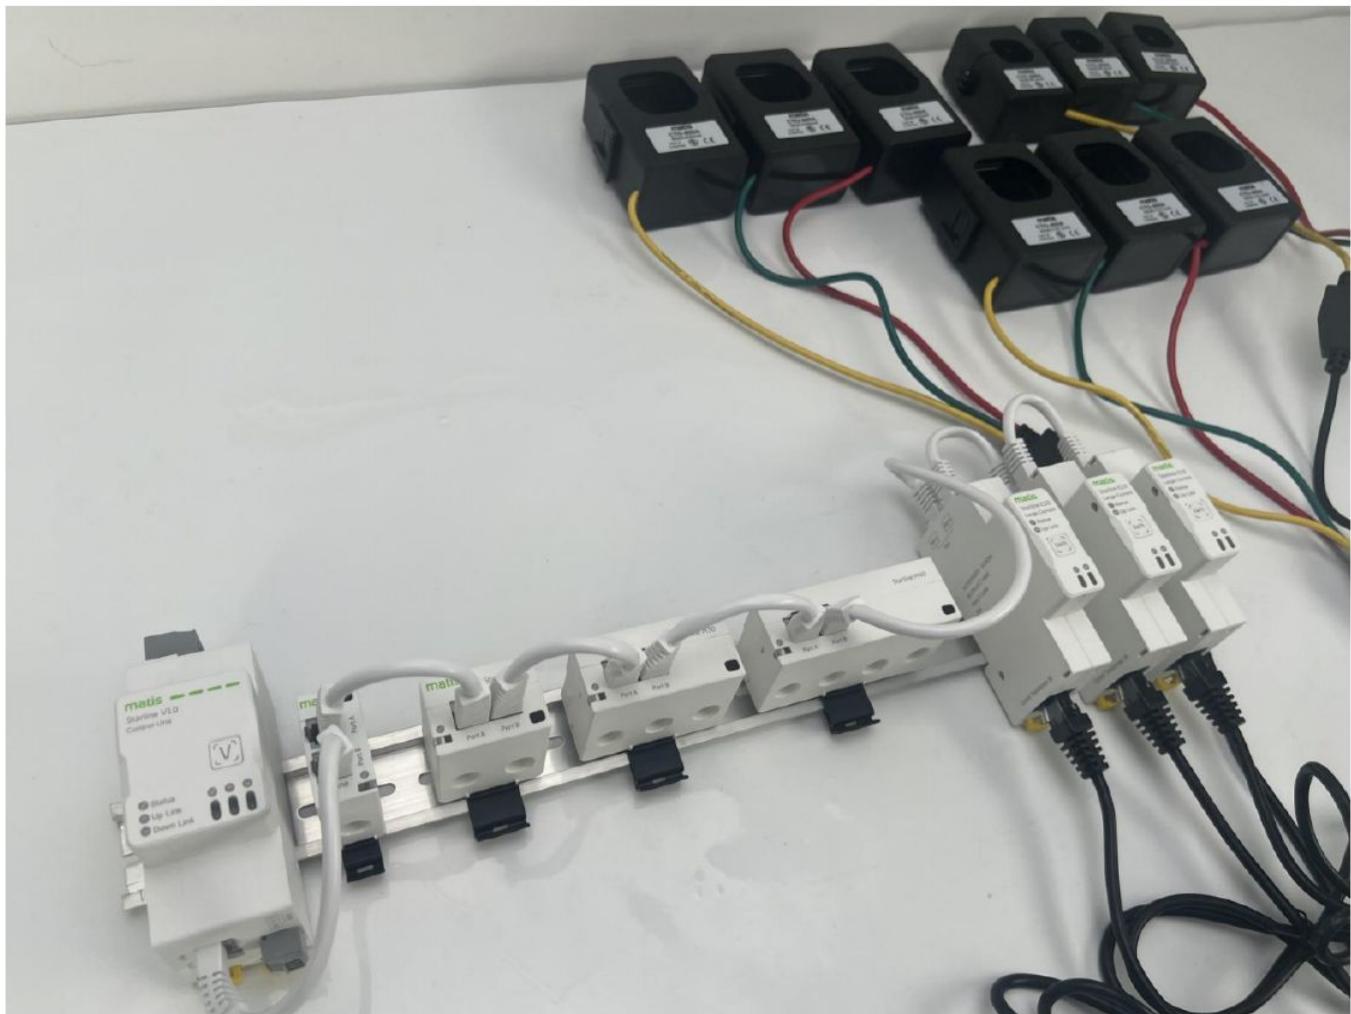




Fig. 2



----- END OF REPORT -----

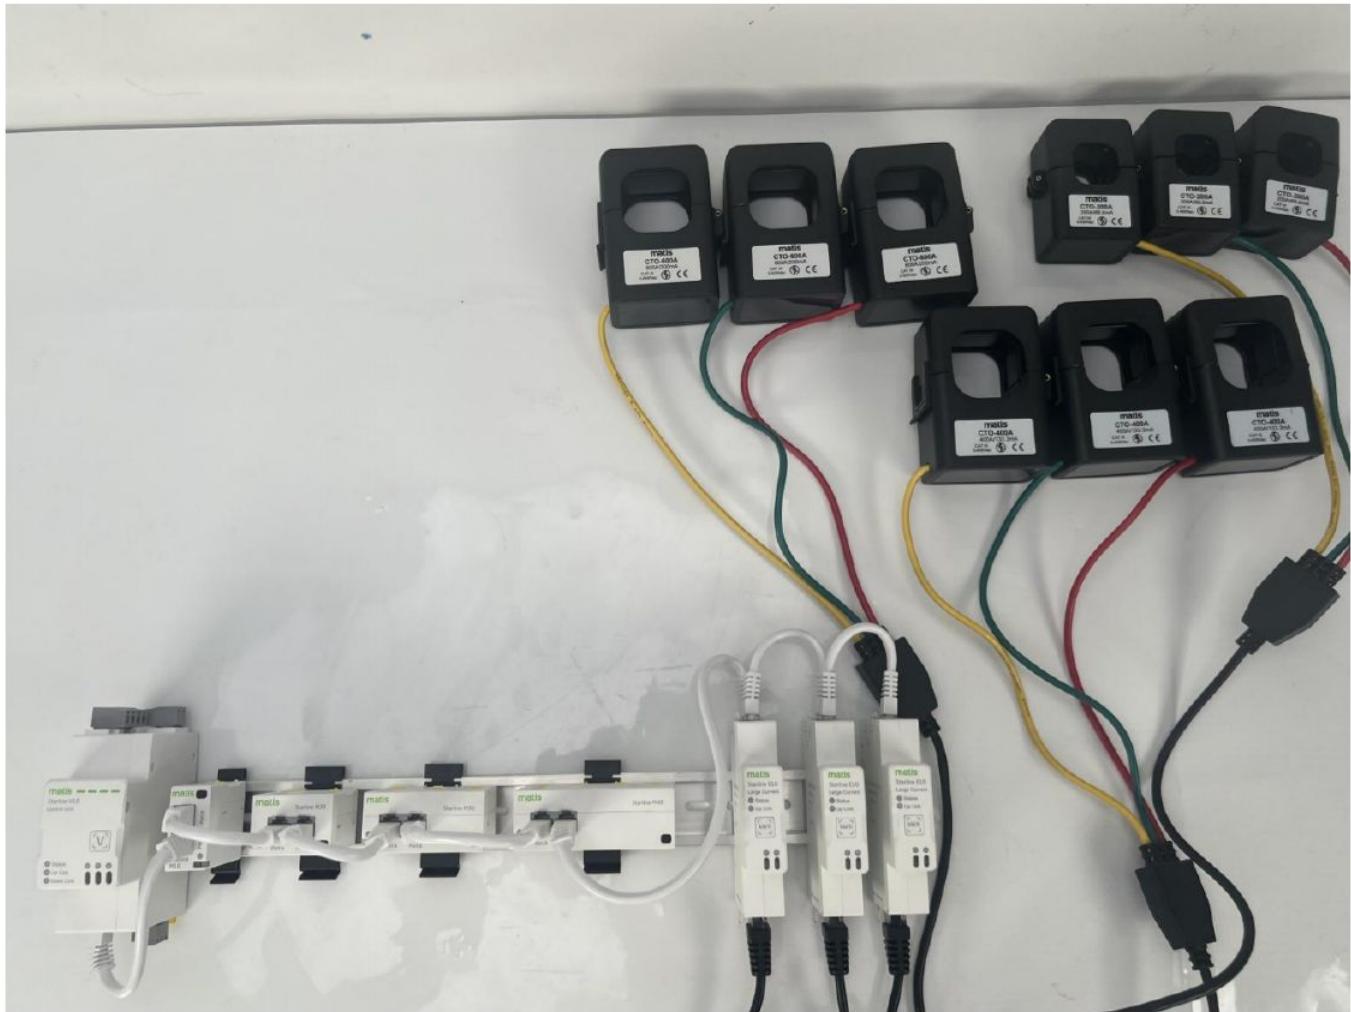

BSTA RELIABLE TESTING FOR TRUST
GLOBAL TESTING AND CERTIFICATION PRECISION SERVICE CLOUD FACTORY

Certificate of Compliance

Certificate No. : XDAK223250958071412AC

Applicant : Shanghai Matis Electric Co.Ltd
: Room318-320, No.83,West Huanghu Road, Pudong,
Shanghai, China 201306

Manufacturer : Shanghai Matis Electric Co.Ltd
: Room318-320, No.83,West Huanghu Road, Pudong,
Shanghai, China 201306

Product Name : Multi Circuit Power Monitoring System

Trade Name : Matis

Main Test Model : Starline -V10 + Starline- M10/20/30/40+
Starline-E10/E11/E31+ CTO100/CTO/200/CTO400/CTO600

Additional Model :

Test Standard : EN 61010-1:2010+A1:2019

As shown in the Test Report No. : XDAK223250958071412AR

The EUT described above has been tested by us with the listed standards and found in compliance with the council LVD directive 2014/35/EU. It is possible to use CE marking to demonstrate the compliance with this LVD Directive.

The certificate applies to the tested sample above mentioned only and shall not imply an assessment of the whole production



BST Testing (Shenzhen)Co., Ltd.

Add:No.7,New Era Industrial Zone, Guantian, Bao'an District,Shenzhen,Guangdong,China.

Certificate Search: <http://www.bst-lab.com>, Tel: 400-962-6168, E-mail:christina@bst-lab.com